



Wandleuchten - Step-Leuchten
1 x powerLED 1 W DC 350 mA | CRI 80
81326M07



□ 50

Technische Daten	
Typ	Step-Leuchten
Installationsposition	Wand
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Asymmetric Wallwasher
Light emission direction	downward
Lampe Nennleistung	1 W DC
Lichtstrom (Lichtquelle)	145 lm
Eingangsspannungsbereich	350mA
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.170 m
Harzbeschichtung	Nein
Einbautiefe	35 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.027 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Technische Merkmale des Produkts	TVS

Oberfläche Oberfläche diffusor

Material	Extra-helles Glas - Gehärtet
Farbe	Transparent

Oberfläche Oberfläche flansch

Material	Aluminium 6082
Farbe	Text white RAL9003
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Elektronik

	89144 On/Off Driver 198-264V AC / 180-275V DC (1 - 2 art.)
---	---

	89145 On/Off Driver 198-264V AC / 180-275V DC (3 - 6 art.)
---	---

	99375 On/Off Driver 198-264V AC (6 - 12 art.)
---	--

Cables Electrification

Cable connector	No
-----------------	----

Wandleuchten - Step-Leuchten | 1 x powerLED 1 W DC 350 mA | CRI 80
81326M07

Single emission wall lights for indoor application. The super warm white LED light source with a asymmetric wallwasher light distribution is composed of 1 powered LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 145 lm, with a 145.0 lm/W nominal luminous efficacy.

The diffuser is made of extra clear glass - tempered.

The ingress protection degree is IP40; the total weight is of 0.027 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W The power supply cable is included and features a 0.170 m length.



The device features protection class III and can be wall lights-mounted, with a 42 x 42 mm hole (in plasterboard) with an outer casing, code 99850(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.



Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	22 %
Lichtstrom (Lichtquelle)	290 lm
Leuchten Lichtstrom	65 lm
Consumption	1,0 W
Leuchten Lichtausbeute	65 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 1240219h (at Tj 65 Ta 25)
L80 B10 C0 745627h (at Tj 65 Ta 25)
L90 B10 C0 309367h (at Tj 65 Ta 25)

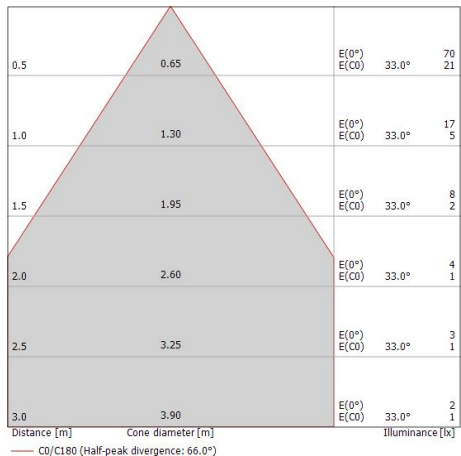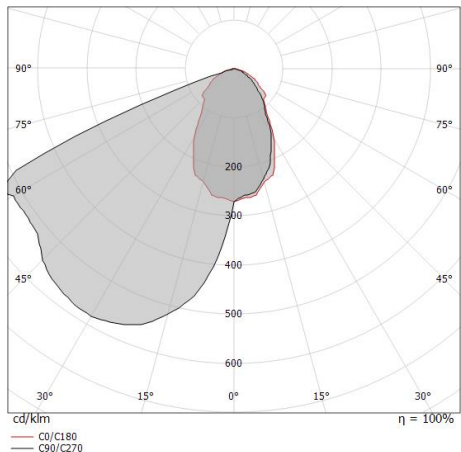

Step | Step Lights | Accessories
81326M07



Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=42mm, H=30mm, D=42mm.
Material:PS, farbe:Weiß.

Code
99850