Mongolfier_P2

Pendelleuchte | 220-240 V
arrayLED 13 W DC - 16 W AC | CRI 90 | Warm Tune
8146

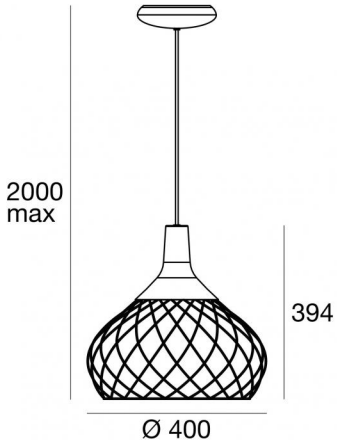

Technische Daten	
Jahr der Verwirklichung	2018
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	13 W DC
Gesamtleistung	16 W
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Lichtstrom (Lichtquelle) 0K	0 lm
Lichtstrom (Lichtquelle) 0K	0 lm
Ähnlichste Farbtemperatur / Tone	Warm Tune
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Phase cut
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	2 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Metall
Farbe	Polished (galvanic) black nickel
Bearbeitungstyp	Tampongalvanisieren

Oberfläche Oberfläche diffusor	
Material	PC
Farbe	Transparent

Oberfläche Oberfläche fassung	
Material	Metall
Farbe	Polished (galvanic) black nickel
Bearbeitungstyp	Tampongalvanisieren

Cables Pendelleuchte	
Max. Kabellänge	2000 mm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pendelleuchte | 220-240 V | arrayLED 13 W DC - 16 W AC | CRI 90 | Warm Tune
8146

Single emission pendant luminaires for indoor application. The warm tune LED light source with a diffused light distribution is composed of 1 arrayled LEDs with CCT of 1800K-3000 K and a CRI 90; the source luminous flux is 1012 lm, with a 77.8 lm/W nominal luminous efficacy.

The device body is made of metal and features a polished (galvanic) black nickel finish, processed by means of electroplating; the diffuser is made of PC; the mounting frame is made of metal, with a polished (galvanic) black nickel finish, processed by means of electroplating.

The ingress protection degree is IP20; the total weight is of 2 kg.

The total absorbed power is 16 W The power supply cable is included and features a 2 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	71 %
Lichtstrom (Lichtquelle)	1012 lm
Leuchten Lichtstrom	722 lm
Consumption	16 W
Leuchten Lichtausbeute	45 lm/W
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

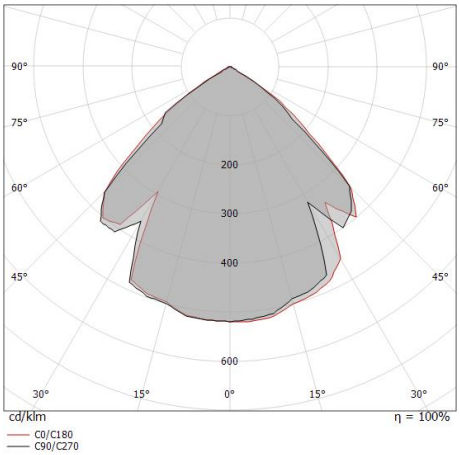

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Mongolfier_P2 | Pendant Luminaires | Accessories
8146



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code
KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi Radio-frequenza, 85-240V

Code
KIT0080

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.