

Uplights | 1 x powerLED 8 W DC 630 mA | RGBW - 3000
81717V06

Single emission uplights for outdoor application. The RGBW - 3000 K LED light source with a ultra spot light distribution is composed of 1 powered LEDs with CCT of RGB-W 3000 K the source luminous flux is 338 lm, with a 42.3 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a matt black (r9005) finish, processed by means of open pore anodizing + powder coating. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard. The product flange is made of steel, a material that ensures high robustness, superior mechanical strength and extended durability, guaranteeing maximum component reliability over time.

The ingress protection degree is IP68; the total weight is of 0.678 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be floor-mounted with an outer casing, code 99681(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.



Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	484 lm
Consumption	9 W
Leuchten Lichtausbeute	53 lm/W
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 202460h (at Tj 60 Ta 25)

UGR	
UGR axial	11.5
UGR transversal	11.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	7°
Light distribution simmetry	Symmetrical

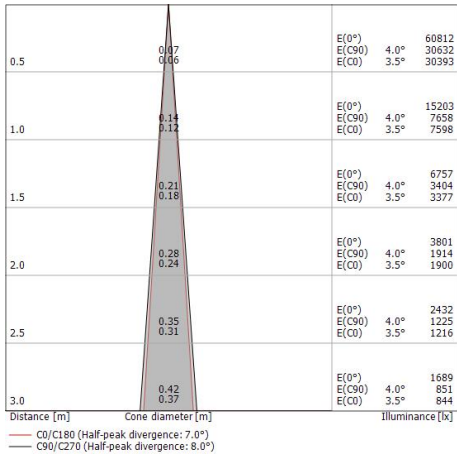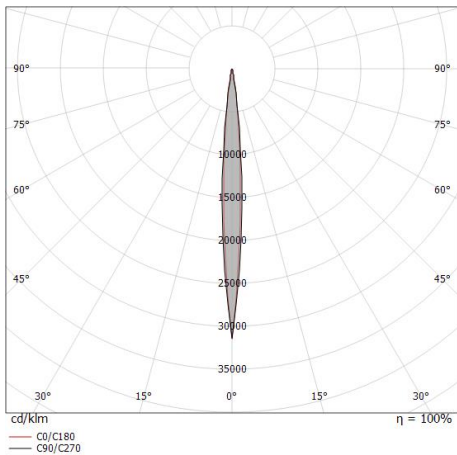

Suelo_R RGBW | Uplights | Accessories
81717V06




Einbaugehäuse

installationsposition: boden; typ installation: mauerwerk L=85mm, H=220mm, D=85mm.

Material:ABS, farbe:Schwarz.

Code


99681



Dimmer - Dimmung über Funkfernbedienung, einzelnen N/O-Taster oder Wi Fi-Netzwerk (Tuya Smart APP). Gerät mit 4 Kanälen: Der erste Dip-Schalter ist für die Stromauswahl vorgesehen, der zweite Dip-Schalter für die Konfiguration: MONO, DYNAMIC, RGB, RGBW. Schutz gegen Übertemperatur, Überlastung, Leitungsunterbrechung und Kurzschluss an der Ausgangsleitung.
RF Remote controller

Code

C-E700003



Remote RF - 2.4G-Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

Code

C-W600001



Kabel - Neopren Verlängerungskabel 9 x 0,5 mm² - Für RGBW-Produkte

Länge 1000 mm; isolierung doppio; querschnitt 0.5 mm²; außendurchmesser: 8.8 mm.

Code

99759