


Scheinwerfer | 176-264 V
1 arrayLED 10.8 W DC - 13 W AC | CRI 98
82073N66

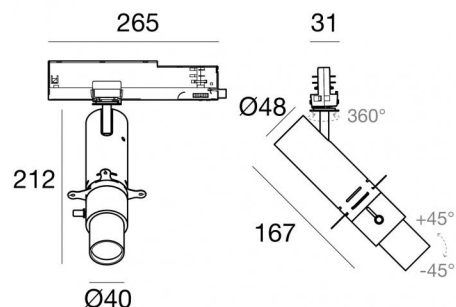

Technische Daten	
Typ	Schiene
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Shaper Long Distance
Light emission direction	frontal
Lampe Nennleistung	10.8 W DC
Gesamtleistung	13 W
Lichtstrom (Lichtquelle)	1182 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	176 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	98 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2 - PUSH DIM
Schwenkbarkeit	Orientabile
Gesamtwinkel (vertikale Ebene)	90 °
Gesamtwinkel (horizontale Ebene)	360 °
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.455 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	2 KV

Oberfläche Oberfläche Gehäuse	
Material	Stranggepresstes Aluminium EN AB - 46100
Farbe	Text white RAL9003
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Scheinwerfer | 176-264 V | 1 arrayLED 10.8 W DC - 13 W AC | CRI 98 | Maximaler optischer Winkel
82073N66

Single emission projectors for indoor application. The natural white LED light source with a shaper long distance light distribution is composed of 1 arrayled LEDs with CCT of 4000 K and a CRI 98; the source luminous flux is 1182 lm, with a 109.4 lm/W nominal luminous efficacy.



The device body is made of die-cast aluminium en ab - 46100 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 0.455 kg.

The total absorbed power is 13 W

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

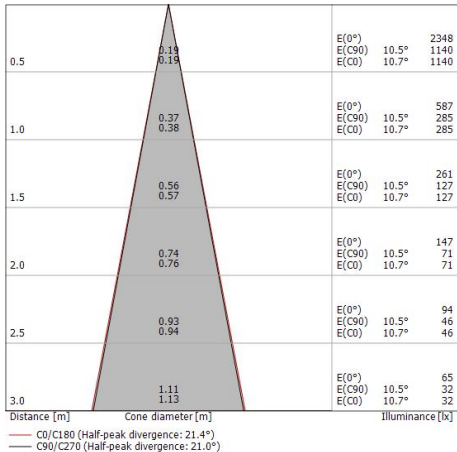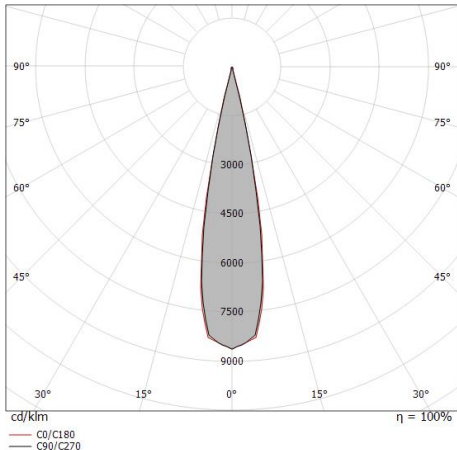

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	5 %
Lichtstrom (Lichtquelle)	1182 lm
Leuchten Lichtstrom	69 lm
Consumption	13 W
Leuchten Lichtausbeute	5 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	98 Ra
Black Body Locus	On
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	45°C

LED Life / Failure Ratio



L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	11.7
UGR transversal	11.8
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	21°
Light distribution simmetry	Symmetrical

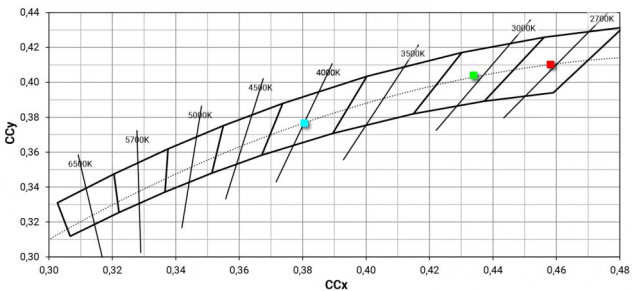

Scheinwerfer | 176-264 V | 1 arrayLED 10.8 W DC - 13 W AC | CRI 98 | Minimaler optischer

Winkel

82073N66

Single emission projectors for indoor application. The natural white LED light source with a shaper long distance light distribution is composed of 1 arrayled LEDs with CCT of 4000 K and a CRI 98; the source luminous flux is 1182 lm, with a 109.4 lm/W nominal luminous efficacy.



The device body is made of die-cast aluminium en ab - 46100 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP20; the total weight is of 0.455 kg.

The total absorbed power is 13 W

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

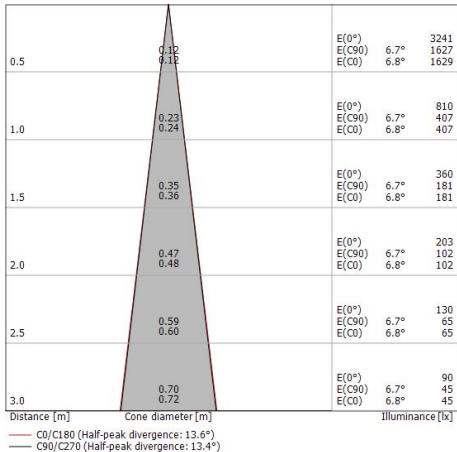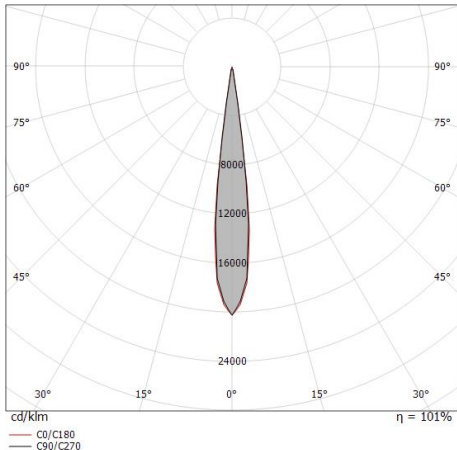

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	3 %
Lichtstrom (Lichtquelle)	1182 lm
Leuchten Lichtstrom	40 lm
Consumption	13 W
Leuchten Lichtausbeute	3 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	98 Ra
Black Body Locus	On
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	45°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	13.3
UGR transversal	13
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	13°
Light distribution simmetry	Symmetrical

