


Systeme | 198-264 V AC /220-240 V DC
120 topLED 18 W DC | 20 W AC | Modular | CRI 80
82570W

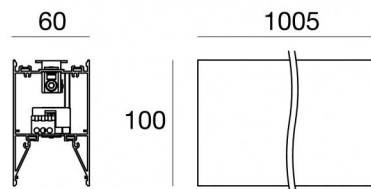

Technische Daten	
Typ	Systeme
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Light emission direction	downward
Lampe Nennleistung	18 W DC
Gesamtleistung	20 W
Lichtstrom (Lichtquelle)	3000 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	2.6 Kg
Modularity	Modular
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	1 KV
Optiktechnologie	Dot free

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Text black RAL9005
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Systeme | 198-264 V AC /220-240 V DC | 120 topLED 18 W DC - 20 W AC | Modular | CRI
80 | + 64698
82570W

Single emission systems for indoor application. The warm white LED light source is composed of 120 topLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3000 lm, with a 166.7 lm/W nominal luminous efficacy.



The device body is made of aluminium alloy 6060 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 2.6 kg.

The total absorbed power is 20 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

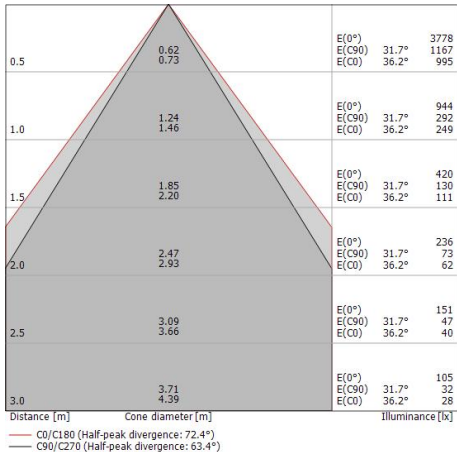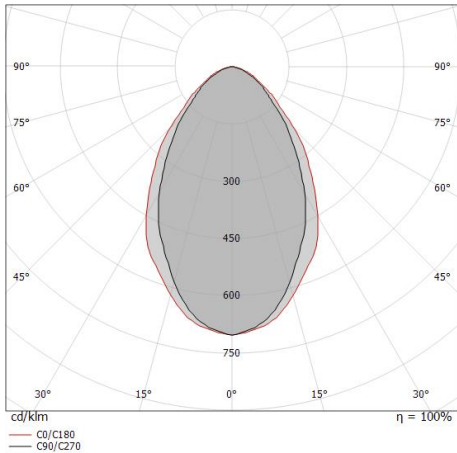

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	44 %
Lichtstrom (Lichtquelle)	3000 lm
Leuchten Lichtstrom	1343 lm
Consumption	20 W
Leuchten Lichtausbeute	67 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 145600h (at Tj 65 Ta 25)

L80 B10 C0 92440h (at Tj 65 Ta 25)

L90 B10 C0 45500h (at Tj 65 Ta 25)

UGR

UGR axial	17.9
UGR transversal	18.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	63°
Optik C0/C180	72°
Light distribution simmetry	Symmetrical 2 assis

Systeme | 198-264 V AC /220-240 V DC | 120 topLED 18 W DC - 20 W AC | Modular | CRI

80 | + 64297

82570W

Single emission systems for indoor application. The warm white LED light source is composed of 120 topLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3000 lm, with a 166.7 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a text black ral9005 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP40; the total weight is of 2.6 kg.

The total absorbed power is 20 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	62 %
Lichtstrom (Lichtquelle)	3000 lm
Leuchten Lichtstrom	1884 lm
Consumption	20 W
Leuchten Lichtausbeute	94 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 145600h (at Tj 65 Ta 25)

L80 B10 C0 92440h (at Tj 65 Ta 25)


L90 B10 C0 45500h (at Tj 65 Ta 25)

UGR

UGR axial	22.9
UGR transversal	25.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	90°
Optik C0/C180	115°
Light distribution simmetry	Symmetrical 2 assis

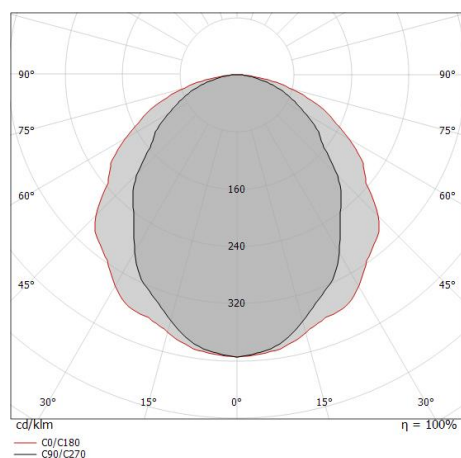


Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.00 1.58	E(0°) 2974 E(C90) 523 E(C0) 228
1.0	2.01 3.16	E(0°) 744 E(C90) 131 E(C0) 57
1.5	3.01 4.75	E(0°) 330 E(C90) 58 E(C0) 25
2.0	4.01 6.33	E(0°) 186 E(C90) 33 E(C0) 14
2.5	5.02 7.91	E(0°) 119 E(C90) 21 E(C0) 9
3.0	6.02 9.49	E(0°) 83 E(C90) 15 E(C0) 6

— C0/C180 (Half-peak divergence: 115.4°)
— C90/C270 (Half-peak divergence: 90.2°)

Rollip60_MS | Systems | Accessories
82570W

 	Diffusor - Opaldiffusor für Rollip60 L.5mt Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code 64297
 	Diffusor - Opaldiffusor für Rollip60 L.10mt Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code 64298
 	Diffusor - Opaldiffusor für Rollip60 L.20mt Diffusorart: opalen diffusor. Material:UV beständiges Polycarbonat, farbe:Opal.	Code 64299
 	Diffusor - Anti-glare diffuser UGR less then 19, L.10mt Diffusorart: anti-abbagliamento. Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.	Code 64699
 	Diffusor - Anti-glare diffuser UGR less then 19, L.5mt Diffusorart: anti-abbagliamento. Material:UV beständiges Polycarbonat, farbe:Opal, bearbeitungstyp :Satinieren.	Code 64698
 	Diffusor Diffusorart: diffusore nero. Material:UV beständiges Polycarbonat, farbe:Black.	Code 64006
 	Diffusor Diffusorart: diffusore nero. Material:UV beständiges Polycarbonat, farbe:Black.	Code 64016
 	Diffusor Diffusorart: diffusore nero. Material:UV beständiges Polycarbonat, farbe:Black.	Code 64026

Rollip60_MS | Systems | Accessories
82570W



Endkappe
Material:Stranggepresstes Aluminium EN AB - 46100, farbe:Text black RAL9005, bearbeitungstyp
:Pulverbeschichtung mit duroplastischen Pulvern.

Code
99982