


FAC CE     IP40  

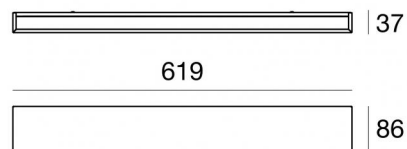

Oberfläche Oberfläche Gehäuse	
Material	Eisen
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung
Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Opal

Wandleuchten | 198-264 V | 144 topLED 24 W DC - 28 W AC | CRI 90
8257N

Double emission wall lights for indoor application. The natural white LED light source with a double diffused light distribution is composed of 144 topLED LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 3839 lm, with a 160.0 lm/W nominal luminous efficacy.

The device body is made of iron and features a text white ral9003 finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP40; the total weight is of 2.1 kg.

The total absorbed power is 28 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	65 %
Lichtstrom (Lichtquelle)	3839 lm
Leuchten Lichtstrom	2501 lm
Consumption	28 W
Leuchten Lichtausbeute	89 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio

L70 B10 C0 102000h (at Tj 115 Ta 25)


L90 B10 C0 55000h

UGR

UGR axial	12
UGR transversal	18.9
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	120°
Optik C90/C270	105°
Light distribution simmetry	Symmetrical 2 assis

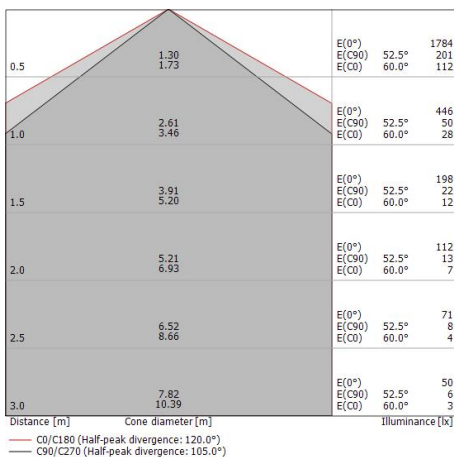


Box_W2 Bi Emission | Wall Lights | Accessories
8257N



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code
KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi
Radio-frequenza, 85-240V

Code
KIT0080