

| CRI 80
8261M

Double emission wall lights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 24 topped LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 1043 lm, with a 115.9 lm/W nominal luminous efficacy.

The device body is made of iron and features a concrete dark grey finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP40; the total weight is of 0.55 kg.

The total absorbed power is 11 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	57 %
Lichtstrom (Lichtquelle)	1043 lm
Leuchten Lichtstrom	598 lm
Consumption	11 W
Leuchten Lichtausbeute	54 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio

L70 B10 C0 102000h (at Tj 115 Ta 25)



L90 B10 C0 55000h

UGR


UGR axial	24.1
UGR transversal	24.9
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	109°
Light distribution simmetry	Symmetrical

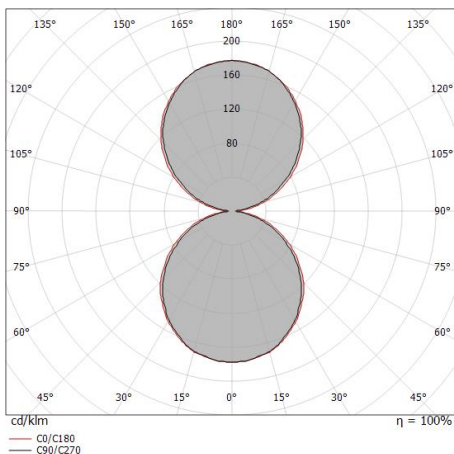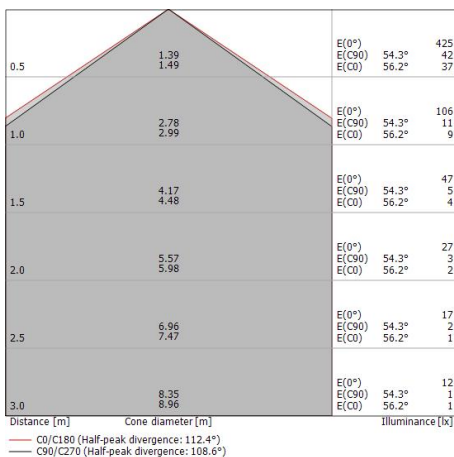


Box_W2 Bi Emission | Wall Lights | Accessories
8261M



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code
KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi
Radio-frequenza, 85-240V

Code
KIT0080