

Wandleuchten | 198-264 V | topLED 24 W DC - 28 W AC | CRI 90  
**8263N**

Double emission wall lights for indoor application. The natural white LED light source with a diffused light distribution is composed of 144 topLED LEDs with CCT of 4000 K and a CRI 90; the source luminous flux is 3839 lm, with a 160.0 lm/W nominal luminous efficacy.

The device body is made of iron and features a concrete dark grey finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP40; the total weight is of 2.1 kg.

The total absorbed power is 28 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

#### Energieeffizienzklasse

Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse D.

#### Illuminotechnical Eigenschaften

|                                       |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 65 %           |
| Lichtstrom (Lichtquelle)              | 3839 lm        |
| Leuchten Lichtstrom                   | 2501 lm        |
| Consumption                           | 28 W           |
| Leuchten Lichtausbeute                | 89 lm/W        |
| Farbtemperatur                        | 4000 K         |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex                   | 90 Ra          |
| Verbindungstemperatur (Leuchte)       | 80             |
| Standardumgebungstemperatur           | 25°C           |

#### LED Life / Failure Ratio

L70 B10 C0 102000h (at Tj 115 Ta 25 )


L90 B10 C0 55000h

#### UGR

|                   |          |
|-------------------|----------|
| UGR axial         | 12       |
| UGR transversal   | 18.9     |
| X=4H   Y=8H       | S=0.25H  |
| Reflection factor | 70/50/20 |

#### OPTICAL

|                             |                     |
|-----------------------------|---------------------|
| Optik C0/C180               | 120°                |
| Optik C90/C270              | 105°                |
| Light distribution simmetry | Symmetrical 2 assis |

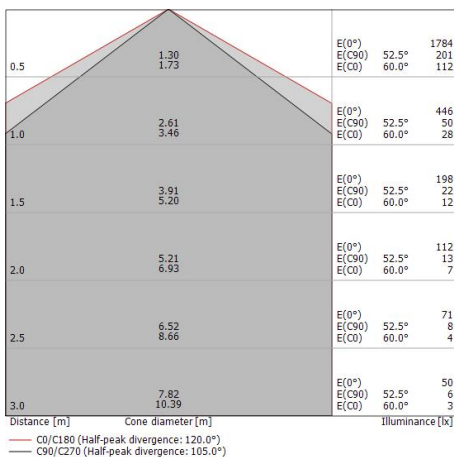


Box\_W2 Bi Emission | Wall Lights | Accessories  
8263N



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe  
220-240V

**Code**  
KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi  
Radio-frequenza, 85-240V

**Code**  
KIT0080