

Wandleuchten - Step-Leuchten
1 x powerLED 1 W DC 350 mA | CRI 80
82701W07



28



Technische Daten	
Typ	Step-Leuchten
Installationsposition	Wand
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Asymmetric Wallwasher
Lampe Nennleistung	1 W DC
Lichtstrom (Lichtquelle)	154 lm
Eingangsspannungsbereich	350mA
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP66
IK	IK09
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1 m
Harzbeschichtung	Ja
Einbautiefe	26 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.062 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse

Material	Messing OT58
Farbe	Text white RAL9003
Bearbeitungstyp	Pulverbeschichtung mit duroplastischen Pulvern

Elektronik



89421
On/Off Driver 198–264V AC / 176–275V DC (3 - 6 art.)



89419
On/Off Driver 198–264V AC / 176–275V DC (1 - 2 art.)



C-E200004
Push and Simply Dim - DALI-2 Controller (5 - 12 art.)



C-E200006
On/Off Driver 198–264V AC / V DC (6 - 12 art.)

Cables Electrification

Cable connector	No connector - Neoprene 2x0.5mm²
-----------------	----------------------------------

Wandleuchten - Step-Leuchten | 1 x powerLED 1 W DC 350 mA | CRI 80
82701W07

Single emission wall lights for outdoor application. The warm white LED light source with a asymmetric wallwasher light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 154 lm, with a 154.0 lm/W nominal luminous efficacy.


The device body is made of brass ot58 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP66; the total weight is of 0.062 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights-mounted, with a 28 mm diameter hole (in plasterboard) with an outer casing, code 84915(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

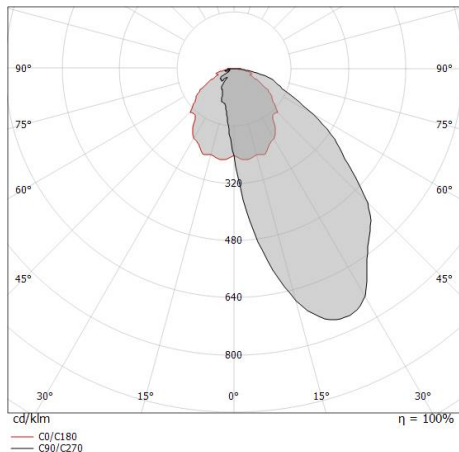

0.5	1.40	E(0°) E(C0)	54.5°	41 4
1.0	2.80	E(0°) E(C0)	54.5°	10 1
1.5	4.21	E(0°) E(C0)	54.5°	5 0
2.0	5.61	E(0°) E(C0)	54.5°	3 0
2.5	7.01	E(0°) E(C0)	54.5°	2 0
3.0	8.41	E(0°) E(C0)	54.5°	1 0

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 109.0°)

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	27 %
Lichtstrom (Lichtquelle)	154 lm
Leuchten Lichtstrom	43 lm
Consumption	1,0 W
Leuchten Lichtausbeute	43 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 1240219h (at Tj 65 Ta 25)

L80 B10 C0 745627h (at Tj 65 Ta 25)

L90 B10 C0 309367h (at Tj 65 Ta 25)

OPTICAL

Optik C0/C180	109°
Light distribution simmetry	Asymmetrical

Clip_Hm | Step Lights | Accessories
82701W07

		Einbaugehäuse installationsposition: wand; typ installation: mauerwerk L=49mm, H=60mm, D=60mm. Material:Kunststoff ABS, farbe:Black.	Code <u>84915</u>
		Einbaugehäuse installationsposition: decke; typ installation: mauerwerk L=42mm, H=35mm, D=35mm. Material:Kunststoff ABS, farbe:Black.	Code <u>84336</u>