
Xenia_W RGBW DMX

80-265 V | topLED 22 W DC - 24 W AC | RGBW - 4000
84048Q90



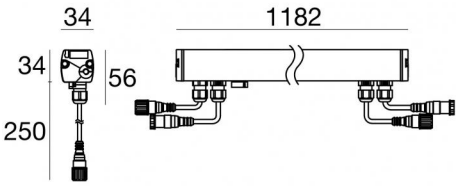

Technische Daten	
Typ	Oberfläche
Installationsposition	Wand - Decke - Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Extra Wide Flood
Light emission direction	upward
Lampe Nennleistung	22 W DC
Gesamtleistung	24 W
Lichtstrom (Lichtquelle)	936 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	85 - 277 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	RGBW - 4000 K
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP66
IK	IK10
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Control unit/Driver
Leuchte dimmbar	DMX-RDM
Schwenkbarkeit	Orientabile
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.30 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.3 Kg
Schutz vor elektrostatischen Entladungen	4 KV
Schutz vor Stoßspannungen	2 KV
Technische Merkmale des Produkts	TCS

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Anodised aluminium
Bearbeitungstyp	Anodisierung 20 µm

Cables Electrification	
Cable connector	Female Socket 4 Pin M12
IP (locked condition)	67
Cable connector	Male Plug 4 pin M12
IP (locked condition)	67

Cables Signal	
Cable connector	Female Socket 5 Pin M12
IP (locked condition)	67
Cable connector	Male Plug 5 Pin M12
IP (locked condition)	67

Nennlichtstrom für eine einzelne Farbe - RGBW - 4000K				
N. Led	Rot	Grün	Blau	Weiß
72	216 lm	144 lm	72 lm	504 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

80-265 V | topLED 22 W DC - 24 W AC | RGBW - 4000
84048Q90

Single emission lines for outdoor application. The RGBW - 4000 K LED light source with a extra wide flood light distribution is composed of 72 topled LEDs with CCT of RGB-W 4000 K the source luminous flux is 936 lm, with a 42.5 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 20 µm anodizing. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP66; the total weight is of 1.3 kg.

The total absorbed power is 22 W The power supply cable is included and features a 0.30 m length.

The device features protection class II and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_W RGBW DMX | Lines | Accessories
84048Q90





Klammer
installationsposition: wand, decke, boden L=95.6mm, H=45mm, D=28mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.

Code
89045



Klammer
installationsposition: wand, decke, boden L=155.6mm, H=45mm, D=28mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.

Code
89046



Klammer
installationsposition: wand, decke, boden L=305.6mm, H=60mm, D=28mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.

Code
89047



Klammer
installationsposition: wand, decke, boden L=35mm, H=72.8mm, D=36.5mm.
Material:Stahl AISI 304, farbe:Scotch Brite Stahl.

Code
98949



Kabel und Stecker - DMX
Länge 5000 mm; isolierung doppio; kabelklemme: nein; außendurchmesser: 4.5 mm.

Code
89189



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

Code
89190



Kabel und Stecker - DMX - Conn. M.5 pin M12 + M.3 pin XLR (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
89186



Kabel und Stecker
Länge 10000 mm; isolierung doppio; kabelklemme: nein.

Code
89187

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_W RGBW DMX | Lines | Accessories
84048Q90



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
98149



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m)
Länge 10000 mm; isolierung doppio; kabelklemme: nein.

Code
89188



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m)
Länge 1500 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

Code
99216



Kabel und Stecker - Verlängerungskabel
Länge 1000 mm; isolierung doppio; kabelklemme: nein.

Code
98437



Kabel und Stecker - DMX - Conn. M.5 pin M12 + M.5 pin XLR (L 5m)
Länge 5000 mm; isolierung doppio; querschnitt 0.25 mm²; kabelklemme: nein.

Code
98493



Kabel und Stecker - DMX - Conn. M.5 pin M12 + F.3 pin XLR (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
98494



Kabel und Stecker
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
98993



Kabel und Stecker
Länge 1000 mm; isolierung doppio; kabelklemme: nein.

Code
98994

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_W RGBW DMX | Lines | Accessories
84048Q90



Blendschutz - Blendschutzblende
Blendschutzart: palpebra.
Material:Aluminiumlegierung 6060, farbe:Anodised aluminium, bearbeitungstyp :Anodisierung 20 µm.

Code
98952

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.