
Xenia_A RGBW DMX

Lineare Elemente | 85-277 V
36 topLED 12 W DC - 13 W AC | RGBW - 3000
84051V07



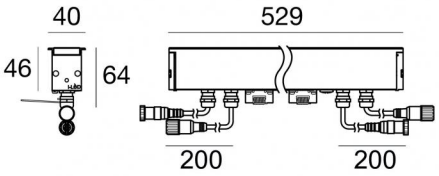

Technische Daten	
Typ	Frame
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Asymmetric Wallwasher
Light emission direction	upward
Lampe Nennleistung	12 W DC
Gesamtleistung	13 W
Lichtstrom (Lichtquelle)	576 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	85 - 277 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	RGBW - 3000 K
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP68
Installationsbeschränkung	Nicht für Einsatz unter Wasser
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Control unit/Driver
Leuchte dimmbar	DMX-RDM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Ja
Überrollbarkeit	2000 Kg
Einschließlich Kabel	Ja
Kabellänge	0.250 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.670 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	6 KV

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Anodised aluminium
Bearbeitungstyp	Anodisierung 20 µm

Oberfläche Oberfläche diffusor	
Material	Extra-helles Glas - Gehärtet
Farbe	Transparent
Bearbeitungstyp	Siebdruck

Cables Signal	
IP (locked condition)	67
Cable connector	Female Socket 5 Pin M12
Cable connector	Male Plug 5 Pin M12
IP (locked condition)	66

Cables Electrification	
Cable connector	Male Plug 4 pin M12
IP (locked condition)	67
IP (locked condition)	67
Cable connector	Female Socket 4 Pin M12

Nennlichtstrom für eine einzelne Farbe - RGBW - 3000K				
N. Led	Rot	Grün	Blau	Weiß
36	108 lm	144 lm	72 lm	252 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 85-277 V | 36 topLED 12 W DC - 13 W AC | RGBW - 3000
84051V07

Single emission lines for outdoor application. The RGBW - 3000 K LED light source with a asymmetric wallwasher light distribution is composed of 36 topled LEDs with CCT of RGB-W 3000 K the source luminous flux is 576 lm, with a 48.0 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 20 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP68; the total weight is of 0.670 kg.

The total absorbed power is 12 W The power supply cable is included and features a 0.250 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 99820(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_A RGBW DMX | Lines | Accessories
84051V07



Kabel und Stecker - DMX
Länge 5000 mm; isolierung doppio; kabelklemme: nein; außendurchmesser: 4.5 mm.

Code
89189



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

Code
89190



Kabel und Stecker - DMX - Conn. M.5 pin M12 + M.3 pin XLR (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
89186



Kabel und Stecker
Länge 10000 mm; isolierung doppio; kabelklemme: nein.

Code
89187



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
98149



Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m)
Länge 10000 mm; isolierung doppio; kabelklemme: nein.

Code
89188



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m)
Länge 1500 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

Code
99216



Kabel und Stecker - Verlängerungskabel
Länge 1000 mm; isolierung doppio; kabelklemme: nein.

Code
98437

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Xenia_A RGBW DMX | Lines | Accessories
84051V07



Kabel und Stecker - DMX - Conn. M.5 pin M12 + M.5 pin XLR (L 5m)
Länge 5000 mm; isolierung doppio; querschnitt 0.25 mm²; kabelklemme: nein.

Code
98493



Kabel und Stecker - DMX - Conn. M.5 pin M12 + F.3 pin XLR (L 5m)
Länge 5000 mm; isolierung doppio; kabelklemme: nein.

Code
98494



Kabel und Stecker
Länge 5000 mm; isolierung doppio; kabelklemme: nein.


Code
98993



Kabel und Stecker
Länge 1000 mm; isolierung doppio; kabelklemme: nein.

Code
98994





Endkappe - Endkappen für Xenia - 2 Stück
Material:Aluminium, farbe:Grau, bearbeitungstyp :Lackierung.

Code
99766



Federn für den Einbau

Code
99818



Einbaugehäuse
installationsposition: boden; typ installation: mauerwerk L=530mm, H=77mm, D=71,1mm.
Material:Aluminiumlegierung 6060, farbe:Anodised aluminium, bearbeitungstyp :Anodisierung 20 µm.

Code
99820

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.