Thin66 RGBW

Lineare Elemente | topLED 19.2 W DC 24 V
RGBW - 3000
84065V00





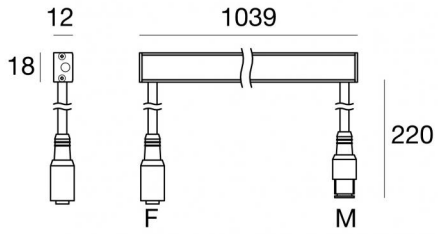

Technische Daten	
Typ	Oberfläche
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	frontal
Lampe Nennleistung	19.2 W DC
Lichtstrom (Lichtquelle)	880 lm
Ähnlichste Farbtemperatur / Tone	RGBW - 3000 K
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP66
IK	IK10
Glühdrahtprüfung	Nein
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.220 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.360 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Optiktechnologie	Dot free

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Anodised aluminium
Bearbeitungstyp	Anodisierung 20 µm

Oberfläche Oberfläche diffusor	
Material	Silikonharz
Farbe	Weiß matt

Elektronik



89359
On/Off Driver 198~264V AC / V DC



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W



99371
Switching Driver 85~264V AC / V DC



99385
DMX-RDM Controller

Cables Electrification	
IP (locked condition)	67
Cable connector	Male Plug 5 Pin M12
Cable connector	Female Socket 5 Pin M12
IP (locked condition)	67

Nennlichtstrom für eine einzelne Farbe - RGBW - 3000K

N. Led	Rot	Grün	Blau	Weiß
6	115 lm	300 lm	90 lm	375 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | topLED 19.2 W DC 24 V | RGBW - 3000
84065V00

Single emission lines for outdoor application. The RGBW - 3000 K LED light source with a diffused light distribution is composed of 60 topled LEDs the source luminous flux is 880 lm, with a 45.8 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 20 µm anodizing; the diffuser is made of silicone resin. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP66; the total weight is of 0.360 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 19.2 W The power supply cable is included and features a 0.220 m length.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Standardumgebungstemperatur	-20 / +40°C
Typische Temperatur am Glas	40°C

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Thin66 RGBW | Lines | Accessories
84065V00



Kabel und Stecker
Länge 5000 mm; kabelklemme: nein; farben: weiß - schwarz - blau - grau - braun.

Code
89362



Kabel und Stecker - 1-10V & DALI - Conn M. + F. 5 pin M12
Länge 10000 mm; isolierung doppio; querschnitt 0.5 mm²; kabelklemme: nein.

Code
89361



Endkappe

Code
89365





Dimmer - Smart_PRO CV | RF Fernbedienungs Controller WiFi – Eingang 12/24/48V – Ausgang: 3A
× 4 Kanäle 12/24/48V
RF Remote controller

Code
C-E700002





Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

Code
C-W600001

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.