


Downlights | 100-240 V
1 arrayLED 24.5 W DC 700 mA | CRI 80
84211W60



KIT
LED lamp
+ Driver

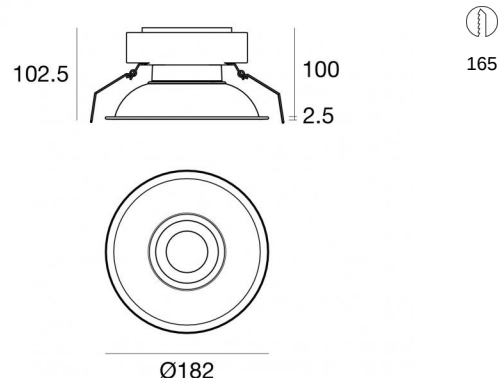


Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Wide Flood
Light emission direction	downward
Lampe Nennleistung	24.5 W DC
Lichtstrom (Lichtquelle)	3478 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	700mA
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP44
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.30 m
Harzbeschichtung	Nein
Einbautiefe	100 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.215 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse

Material	Aluminium
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Elektronik im Kit enthalten

83078
None On/Off Driver 100~240V AC
Elektrische Isolationsklasse 2



Downlights | 100-240 V | 1 arrayLED 24.5 W DC 700 mA | CRI 80
84211W60

Single emission recessed downlights for indoor application. The warm white LED light source with a wide flood light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3478 lm, with a 142.0 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a text white ral9003 finish, processed by means of coating.

The ingress protection degree is IP44; the total weight is of 0.215 kg.

The total absorbed power is 27.5 W The power supply cable is included and features a 0.30 m length.

The device features protection class III and can be ceiling-mounted, with a 165 mm diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

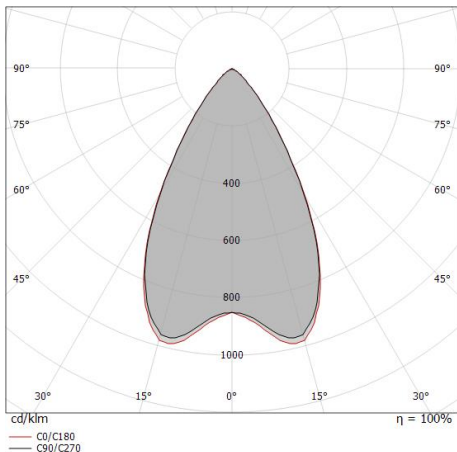

0.5	0.58 0.58	E(0°) E(C90) E(C0)	30.3° 30.1° 30.1°	8529 3137 3225
1.0	1.17 1.16	E(0°) E(C90) E(C0)	30.3° 30.1° 30.1°	2132 784 806
1.5	1.75 1.74	E(0°) E(C90) E(C0)	30.3° 30.1° 30.1°	948 349 358
2.0	2.34 2.32	E(0°) E(C90) E(C0)	30.3° 30.1° 30.1°	533 196 202
2.5	2.92 2.90	E(0°) E(C90) E(C0)	30.3° 30.1° 30.1°	341 125 129
3.0	3.51 3.48	E(0°) E(C90) E(C0)	30.3° 30.1° 30.1°	237 87 90

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 60.2°)
— C90/C270 (Half-peak divergence: 60.6°)

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	72 %
Lichtstrom (Lichtquelle)	3478 lm
Leuchten Lichtstrom	2509 lm
Consumption	27.5 W
Leuchten Lichtausbeute	91 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	80 Ra
Black Body Locus	On
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 252000h (at Tj 65 Ta 25)

UGR

UGR axial	17.5
UGR transversal	17.5
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	60°
Light distribution simmetry	Symmetrical

