
Lineare Elemente - Industriebeleuchtung

198-264 V AC /176-276 V DC | topLED 13 W DC - 14.5 W AC | Modular | CRI 80 | Grün

84401G12



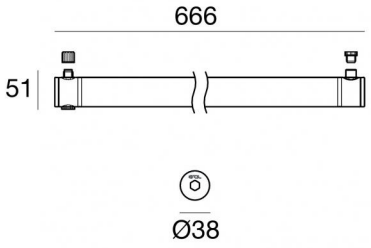

Technische Daten	
Typ	Oberfläche - Industriebeleuchtung
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Extra Wide Flood
Light emission direction	external
Lampe Nennleistung	13 W DC
Gesamtleistung	14.5 W
Lichtstrom (Lichtquelle)	995 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	Grün
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP66
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.74 Kg
Modularity	Modular
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja
Technische Merkmale des Produkts	TCS

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Anodised aluminium
Bearbeitungstyp	Eloxierung

Oberfläche Oberfläche diffusor	
Material	UV beständiges Polycarbonat
Farbe	Gekräuselt

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente - Industriebeleuchtung | 198-264 V AC /176-276 V DC | topLED 13 W DC - 14.5 W AC | Modular | CRI 80 | Grün

84401G12

Single emission lines for outdoor application. The green LED light source with a extra wide flood light distribution is composed of 36 topled LEDs and a CRI 80; the source luminous flux is 995 lm, with a 76.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a anodised aluminium finish, processed by means of anodisation; the diffuser is made of uv resistant polycarbonate. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP66; the total weight is of 0.74 kg.

The total absorbed power is 14.5 W

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


Illuminotechnical Eigenschaften	
Lichtstrom (Lichtquelle)	995 lm
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	35°C

LED Life / Failure Ratio
L70 B10 C0 145770h (at Tj 65 Ta 25)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

High Protection | Industrial Lighting | Accessories
84401G12






Kabel für Aufhängung - Befestigungssatz für die Aufhängung
Material:Stahl, farbe:Stahl.

Code
99219






Befestigungssatz - Männlich / weiblich anodisierte Aluminiumbeschläge

Code
99221





Befestigungssatz - Befestigungssatz aus transparentem Polycarbonat

Code
99222





Befestigungssatz - Clip-Befestigungssatz aus vernickeltem Stahl + O-Ring

Code
99220






Befestigungssatz - Clip-Befestigungssatz aus transparentem Polycarbonat + O-Ring

Code
99238






Befestigungssatz - Eckbefestigungssatz

Code
99224






Befestigungssatz - Befestigungssatz mit seitlichen Halterungen

Code
99223





Befestigungssatz - IP66-Anschlussbox

Code
83229

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

High Protection | Industrial Lighting | Accessories
84401G12



Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m)
Länge 1500 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.

Code
99216



Kabel und Stecker
Typ Kabel power cable; Länge 150 mm; isolierung einzeln; querschnitt 0.34 mm²; außendurchmesser: 4 mm.

Code
99217



Kabel und Stecker
Typ Kabel power cable; Länge 1500 mm; isolierung einzeln; querschnitt 0.34 mm²; außendurchmesser: 4 mm.

Code
99218

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.