

Downlights | 3 x powerLED 2.1 W DC 220 mA | RGB
86612Z30

Single emission recessed downlights for indoor application. The RGB LED light source with a flood light distribution is composed of 3 powered LEDs the source luminous flux is 130 lm, with a 61.9 lm/W nominal luminous efficacy.

The device body is made of brass and features a polished (galvanic) chrome finish, processed by means of electroplating.

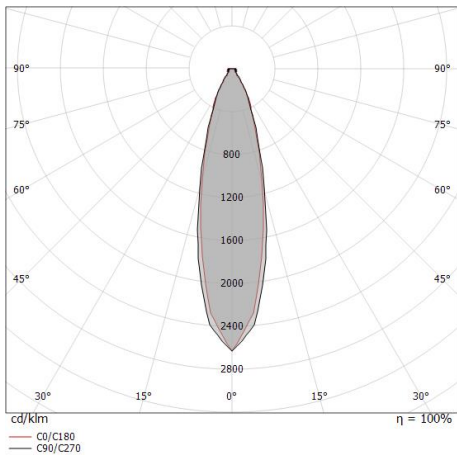
The ingress protection degree is IP44; the total weight is of 0.072 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2.1 W The power supply cable is included and features a 0.12 m length.



The device features protection class III and can be wall lights or ceiling-mounted, with a 29 mm diameter hole (in plasterboard) with an outer casing, code 84901(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	114 lm
Consumption	2,1 W
Leuchten Lichtausbeute	57 lm/W
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C
LED Life / Failure Ratio	
L70 B10 C0 247450h	
OPTICAL	
Optik C0/C180	25°
Light distribution simmetry	Symmetrical



Nitum_R | Downlights | Accessories
86612Z30

 	Einbaugehäuse installationsposition: decke; typ installation: mauerwerk L=69mm, H=60mm, D=60mm. Material:Kunststoff ABS, farbe:Black.	Code <u>84901</u>
	Kabel und Stecker Typ Kabel power cable; Länge 1000 mm; isolierung einzeln; querschnitt 0.5 mm²; farben: blau - grün - rot.	Code <u>84866</u>
	Kabel und Stecker Typ Kabel power cable; Länge 3000 mm; isolierung einzeln; querschnitt 0.5 mm²; farben: blau - grün - rot.	Code <u>84867</u>
	Kabel und Stecker Typ Kabel power cable; Länge 1500 mm; isolierung einzeln; querschnitt 0,35 mm²; farben: blau - grün - rot.	Code <u>84872</u>
	Kabel und Stecker Typ Kabel power cable; Länge 1500 mm; isolierung einzeln; querschnitt 0,35 mm²; farben: weiß - schwarz.	Code <u>84873</u>
 	Dimmer - Dimmung über Funkfernbedienung, einzelnen N/O?Taster oder Wi Fi?Netzwerk (Tuya Smart APP). Gerät mit 4 Kanälen: Der erste Dip?Schalter ist für die Stromauswahl vorgesehen, der zweite Dip?Schalter für die Konfiguration: MONO, DYNAMIC, RGB, RGBW. Schutz gegen Übertemperatur, Überlastung, Leitungsunterbrechung und Kurzschluss an der Ausgangsleitung. RF Remote controller	Code <u>C-E700003</u>
 	Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus	Code <u>C-W600001</u>