Aspho_R

Downlights | 1 x 5mmLED 1.5 W DC 24 V | RGB
86707Z30



15

Technische Daten	
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	5mmLED
Optik	Medium Wide Flood
Lampe Nennleistung	1.5 W DC
Lichtstrom (Lichtquelle)	11 lm
Ähnlichste Farbtemperatur / Tone	RGB
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP44
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Ja
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.12 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.015 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Messing gebürstet
Farbe	Polished (galvanic) chrome
Bearbeitungstyp	Tampongalvanisieren

Elektronik

99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 300 art.)

C-E700005
DMX-RDM Multi Channel V DC (- art.)

Nennlichtstrom für eine einzelne Farbe - RGB

N. Led	Rot	Grün	Blau
1	3 lm	5 lm	3 lm

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Downlights | 1 x 5mmLED 1.5 W DC 24 V | RGB
86707Z30

Single emission recessed downlights for indoor application. The RGB LED light source with a medium wide flood light distribution is composed of 1 5mmled LEDs the source luminous flux is 11 lm, with a 7.3 lm/W nominal luminous efficacy.

The device body is made of brass and features a polished (galvanic) chrome finish, processed by means of electroplating.

The ingress protection degree is IP44; the total weight is of 0.015 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1.5 W The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be wall lights or ceiling-mounted, with a 15 mm diameter hole (in plasterboard) with an outer casing, code 84335(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	60 lm
Consumption	1,5 W
Leuchten Lichtausbeute	60 lm/W
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

UGR	
UGR axial	30
UGR transversal	30.5
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	45°
Light distribution simmetry	Symmetrical

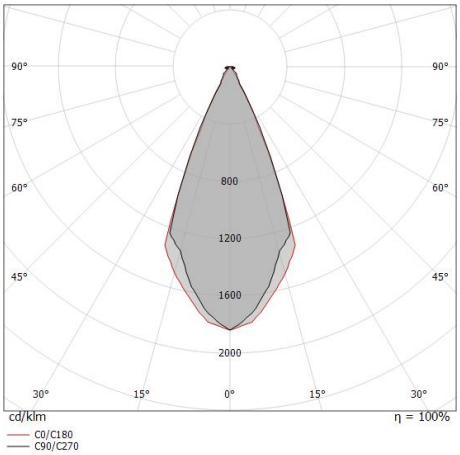

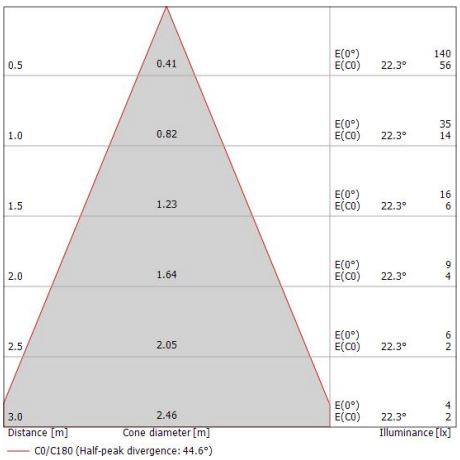

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Aspho_R | Downlights | Accessories
86707Z30

Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=35mm, H=20mm, D=20mm.
Material:Kunststoff ABS, farbe:Black.

Code
84335



Dimmer - Smart_PRO CV | RF Fernbedienungs Controller WiFi – Eingang 12/24/48V – Ausgang: 3A × 4 Kanäle 12/24/48V
RF Remote controller

Code
C-E700002



Remote RF - 2.4G?RF?Fernbedienung mit mehreren Funktionen: Dimmen, Geschwindigkeit, Ein/Aus

Code
C-W600001

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.