


Downlights | 1 x powerLED 1 W DC 350 mA | CRI 80
86882W00



Technische Daten	
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Diffuses
Lampe Nennleistung	1 W DC
Lichtstrom (Lichtquelle)	145 lm
Eingangsspannungsbereich	350mA
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP44
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja

Downlights | 1 x powerLED 1 W DC 350 mA | CRI 80
86882W00

Single emission recessed downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 145 lm, with a 145.0 lm/W nominal luminous efficacy.



The device body is made of stainless steel and features a steel finish, processed by means of shot peening. The robust steel structure enhances the fixture's design and ensures long-lasting performance, even in the most demanding environments.

The ingress protection degree is IP44; the total weight is of 0.06 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be wall lights or ceiling-mounted, with a 29 mm diameter hole (in plasterboard) with an outer casing, code 84915(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

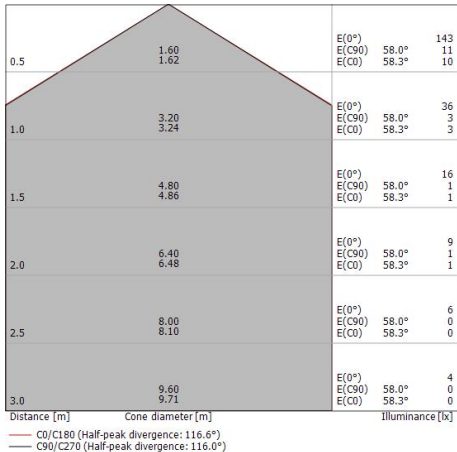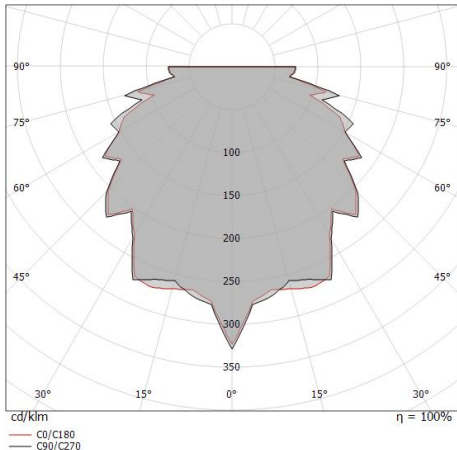

Nitum_Q | Downlights | Accessories
86882W00

		Einbaugehäuse installationsposition: decke; typ installation: mauerwerk L=42mm, H=35mm, D=35mm. Material:Kunststoff ABS, farbe:Black.	Code 84336
		Einbaugehäuse installationsposition: wand; typ installation: mauerwerk L=49mm, H=60mm, D=60mm. Material:Kunststoff ABS, farbe:Black.	Code 84915