


Downlights | 1 x powerLED 1.5 W DC 500 mA | CRI 80
87353C00

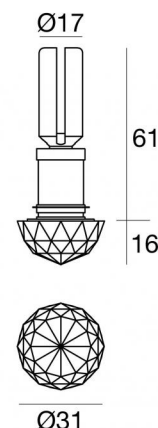

Technische Daten	
Typ	Halbeinbau
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	1.5 W DC
Lichtstrom (Lichtquelle)	227 lm
Eingangsspannungsbereich	500mA
Ähnlichste Farbtemperatur / Tone	5000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP52
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.12 m
Harzbeschichtung	Nein
Einbautiefe	61 mm
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.080 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse

Material	Messing gebürstet
Farbe	Polished (galvanic) chrome
Bearbeitungstyp	Tampongalvanisieren

Oberfläche Oberfläche diffusor

Material	Kristallglas
Farbe	Transparent

Elektronik

 89146
On/Off Driver 198-264V AC / 180-275V DC

 99195
On/Off Driver 198-264V AC / 180-275V DC

 99377
On/Off Driver 198-264V AC

Downlights | 1 x powerLED 1.5 W DC 500 mA | CRI 80
87353C00

Single emission recessed downlights for indoor application. The cold white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 5000 K and a CRI 80; the source luminous flux is 227 lm, with a 151.3 lm/W nominal luminous efficacy.

The device body is made of brass and features a polished (galvanic) chrome finish, processed by means of electroplating; the diffuser is made of glass.

The ingress protection degree is IP52; the total weight is of 0.080 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1.5 W The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be ceiling-mounted, with a 20 mm diameter hole (in plasterboard) with an outer casing, code 84954(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Lichtstrom (Lichtquelle)	227 lm
Farbtemperatur	5000 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C
LED Life / Failure Ratio	
L70 B10 C0 716641h (at Tj 65 Ta 25)	
L80 B10 C0 445035h (at Tj 65 Ta 25)	
L90 B10 C0 205461h (at Tj 65 Ta 25)	

Ture | Downlights | Accessories
87353C00



Einbaugehäuse
installationsposition: wand, decke; typ installation: mauerwerk L=86mm, H=60mm, D=60mm.
Material:Schwarz, farbe:Black.

Code
84954