

Pendelleuchte | 220-240 V | 4 topLED 16 W DC - 20 W AC | CRI 90
8842

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 128 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2414 lm, with a 150.9 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a text white ral9003 finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of iron, with a text white ral9003 finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 1.6 kg.

The total absorbed power is 20 W The power supply cable is included and features a 2.6 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

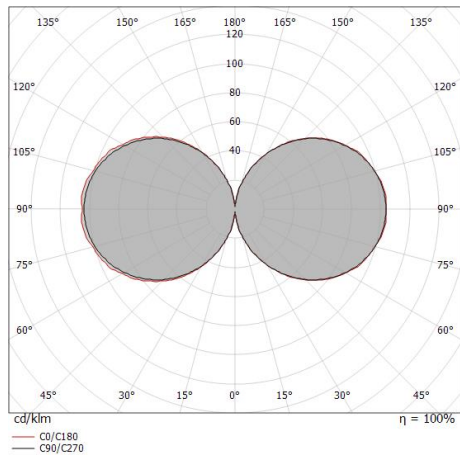

Energieeffizienzklasse	
Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse D.	
Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	97 %
Lichtstrom (Lichtquelle)	2414 lm
Leuchten Lichtstrom	2343 lm
Consumption	20 W
Leuchten Lichtausbeute	117 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C
LED Life / Failure Ratio	
L70 B10 C0 102000h (at Tj 115 Ta 25)	
L90 B10 C0 55000h	
OPTICAL	
Optik C0/C180	180°
Light distribution simmetry	Symmetrical