


Wandleuchten - Deckenleuchten | 198-264 V
topLED 41 W DC - 48 W AC | CRI 90
8851

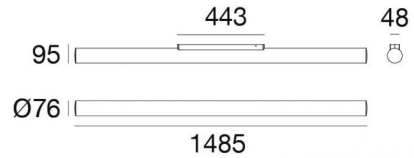

Technische Daten	
Typ	Oberfläche - Oberfläche
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward and upward
Lampe Nennleistung	41 W DC
Gesamtleistung	48 W
Lichtstrom (Lichtquelle)	6234 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP40
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2 - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Zweiflammig
Nettogewicht	3.185 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	1 KV

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Opal

Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Wandleuchten - Deckenleuchten | 198-264 V | topLED 41 W DC - 48 W AC | CRI 90
8851

Double emission wall lights or ceiling downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 352 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 6234 lm, with a 152.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white ral9003 finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of iron, with a text white ral9003 finish, processed by means of coating.

The ingress protection degree is IP40; the total weight is of 3.185 kg.

The total absorbed power is 48 W

The device features protection class I and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 11 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	86 %
Lichtstrom (Lichtquelle)	6234 lm
Leuchten Lichtstrom	5370 lm
Consumption	48 W
Leuchten Lichtausbeute	111 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C


LED Life / Failure Ratio

L70 B10 C0 102000h (at Tj 115 Ta 25)



L90 B10 C0 55000h

OPTICAL

Optik C90/C270	180°
Light distribution simmetry	Asymmetrical

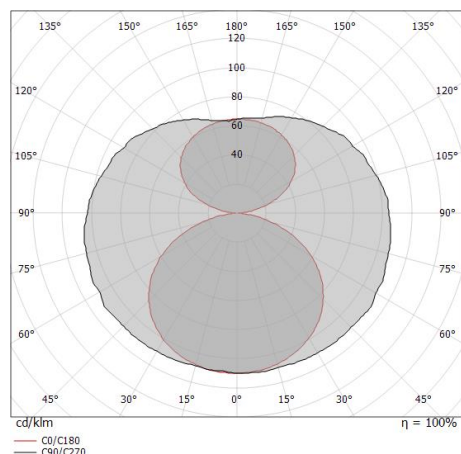

Tu-Top | Ceiling Downlights | Accessories
8851



Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle
Bluetooth, 220-240V

Code
KIT0079