


| CRI 90
8870

126

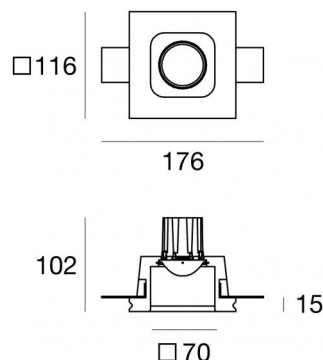

Technische Daten	
Typ	Downlights
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	arrayLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	7 W DC
Lichtstrom (Lichtquelle)	748 lm
Eingangsspannungsbereich	700mA
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CC
Isolierklasse	3
IP	IP20
IP optisches System	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflamig
Nettogewicht	1.42 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Ähnlichste Farbtemperatur / Tone	3000 K

Oberfläche Oberfläche Gehäuse

Material	gesso
Farbe	Weiß

Oberfläche Oberfläche diffusor

Material	Glas
Farbe	Weiß
Bearbeitungstyp	Sandstrahlen

Elektronik

99115
1-10V - N/O button Multi Power 198~264V AC / V DC (1 - 2 art.)



99243
On/Off Driver 198~264V AC / V DC (1 art.)



99147
On/Off Driver 198~264V AC (1 - 3 art.)



C-E100001
Push and Simply Dim - DALI-2 Multi Power 198~264V AC / V DC (1 - 3 art.)

| CRI 90 | Farbtemperatur: 3000 K
8870

Single emission recessed downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 arrayed LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 748 lm, with a 106.9 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish; the diffuser is made of glass with a sandblasting treatment.

The ingress protection degree is IP20; the total weight is of 1.42 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 7 W

The device features protection class III and can be ceiling-mounted, with a 126 x 126 mm hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	63 %
Lichtstrom (Lichtquelle)	748 lm
Leuchten Lichtstrom	475 lm
Consumption	7 W
Leuchten Lichtausbeute	67 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio

L70 B10 C0 314051h (at Tj 65 Ta 25)

L80 B10 C0 196584h (at Tj 65 Ta 25)


L90 B10 C0 92791h (at Tj 65 Ta 25)

UGR

UGR axial	26.5
UGR transversal	26.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C0/C180	76°
Light distribution simmetry	Symmetrical

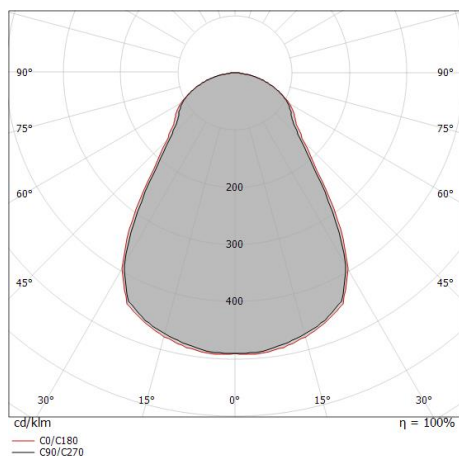

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.78 0.80	E(0°) 933 E(C90) 231 E(C0) 225
1.0	1.55 1.60	E(0°) 233 E(C90) 58 E(C0) 56
1.5	2.33 2.39	E(0°) 104 E(C90) 26 E(C0) 25
2.0	3.10 3.19	E(0°) 58 E(C90) 14 E(C0) 14
2.5	3.88 3.99	E(0°) 37 E(C90) 9 E(C0) 9
3.0	4.65 4.79	E(0°) 26 E(C90) 6 E(C0) 6

— C0/C180 (Half-peak divergence: 77.2°)
— C90/C270 (Half-peak divergence: 75.6°)


Gypsum_QRD | Downlights | Accessories
8870



Glas - Milchglas

Code

60840



Dicken - KIT Dicken für die Montage auf Gipskarton

Code

60830