
Pistillo

Poller & Mastaufsatzleuchten
12 topLED 4 W DC 24 V | CRI 80
8945M





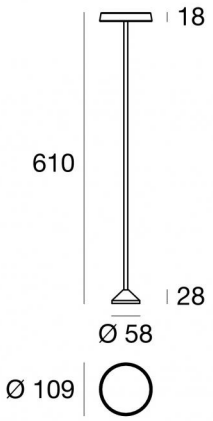

Technische Daten	
Jahr der Verwirklichung	2019
Typ	Poller
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	4 W DC
Lichtstrom (Lichtquelle)	350 lm
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP65
IK	IK06
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.39 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Edelstahl --
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PU
Farbe	Weiß

Oberfläche Oberfläche fassung	
Material	Kunststoff ABS
Farbe	Black

Elektronik



89179
On/Off Driver 198~264V AC 24 W (- art.)



Kit0018
None On/Off Driver 220~240V AC / 176~276V DC 10 W (1 - 2 art.)



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (- art.)



99722
DALI Controller 90~305V AC / V DC (- art.)



83009
On/Off Driver 180~264V AC / V DC (- art.)



KIT0116
None On/Off Driver 220~240V AC 30 W (1 - 7 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Poller & Mastaufsatzleuchten | 12 topLED 4 W DC 24 V | CRI 80
8945M

Single emission bollard & pole for outdoor application. The super warm white LED light source with a diffused light distribution is composed of 12 topled LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 350 lm, with a 87.5 lm/W nominal luminous efficacy.


The device body is made of stainless steel, processed by means of coating; the diffuser is made of pu; the mounting frame is made of abs plastic, with a black finish. The robust steel structure enhances the fixture's design and ensures long?lasting performance, even in the most demanding environments.


The ingress protection degree is IP65; the total weight is of 0.39 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 4 W The power supply cable is included and features a 2 m length.

The device features protection class III and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

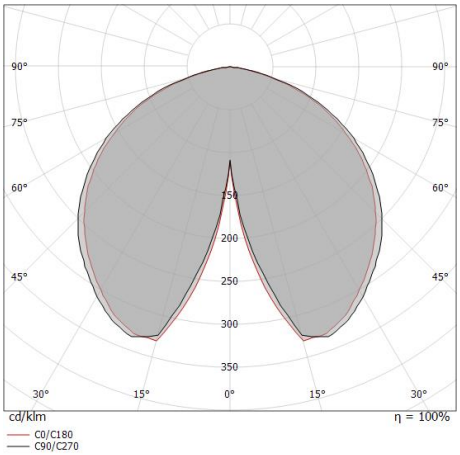

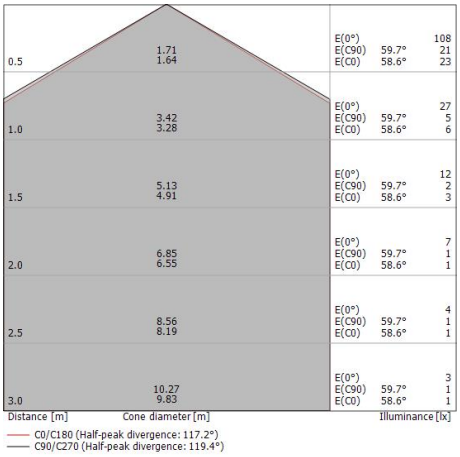

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	70 %
Lichtstrom (Lichtquelle)	350 lm
Leuchten Lichtstrom	247 lm
Consumption	4 W
Leuchten Lichtausbeute	61 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B10 C0 191000h
L80 B10 C0 120000h
L90 B10 C0 58000h


UGR	
UGR axial	23.6
UGR transversal	23.4
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	117°
Light distribution simmetry	Symmetrical

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Pistillo | Bollard & Pole | Accessories
8945M





Erdspießen

installationsposition: terreno,Material Verkleidung: pc

Code

KIT77



Stecker

Code

14992

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.