
Periscopio

Tischleuchten | 220-240 V | 1x7W G9
9057





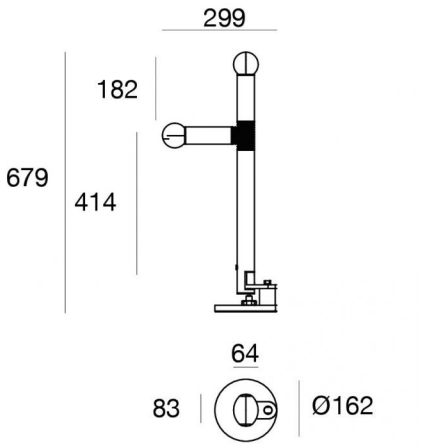

Technische Daten	
Designer	Danilo & Corrado Aroldi
Jahr der Verwirklichung	1967
Typ	Tischleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Ja
Anschluss der Leuchte	1 x G9
Light emission direction	downward and upward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Ja
Gesamtwinkel (horizontale Ebene)	330 °
Gesamtwinkel (vertikale Ebene)	180 °
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Steckdose	Type C
Kabellänge	2 m
Harzbeschichtung	Nein
Nettogewicht	4,295 Kg

Oberfläche Oberfläche Gehäuse	
Material	Stahl AISI 304
Farbe	Polished red iconic (R3020)
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	Glas - Glas
Farbe	Weiß - Grau
Bearbeitungstyp	Satinieren - Lackierung

Oberfläche Oberfläche sockel	
Material	Eisen
Farbe	Text black (R9005)
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Periscopio

Tischleuchten | 220-240 V | 1x7W G9
9057

Double emission table lamps for indoor application. LED lamplamp included, lamp cap G9 1x7W.

The device body is made of aisi 304 steel and features a polished red iconic (r3020) finish, processed by means of coating; the diffuser is made of glass with a satin finishing treatment; the diffuser is made of glass with a coating treatment. The robust steel structure enhances the fixture’s design and ensures long?lasting performance, even in the most demanding environments.

The ingress protection degree is IP20;


The power supply cable is included and features a 2 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	100 %
Leuchten Lichtstrom	450 lm
Consumption	7 W
Leuchten Lichtausbeute	64 lm/W
Farbtemperatur	3000 K
Farbwiedergabeindex	80 Ra
Lichtstrom (Lichtquelle)	1 x 700 lm
Standardumgebungstemperatur	25°C

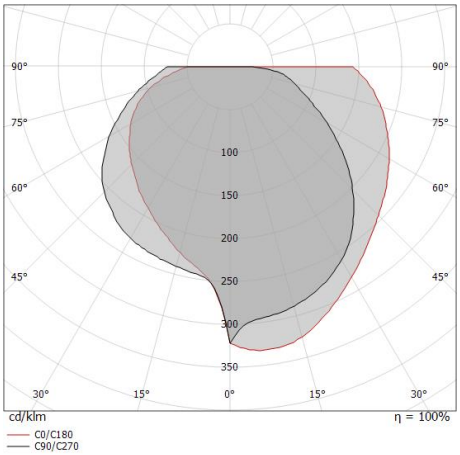

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.