
Downlights | 1 x powerLED 4 W DC 350 mA | CRI 80

**90732M60**








29

| Technische Daten | |
|---|---|
| Installationsposition | Decke |
| Installationsumgebung | Indoor |
| Lichtquelle | LED |
| Circuit structure | powerLED |
| Optik | 60° |
| Light emission direction | downward |
| Lampe Nennleistung | 4 W DC |
| Lichtstrom (Lichtquelle) | 490 lm |
| Eingangsspannungsbereich | 350mA |
| Ähnlichste Farbtemperatur / Tone | 2700 K |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | CC |
| Isolierklasse | 3 |
| IP | IP44 |
| IP optisches System | IP65 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Nein |
| Leuchte dimmbar | DALI - 1-10V |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 0.170 m |
| Harzbeschichtung | Nein |
| Einbautiefe | 85 mm |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 0.078 Kg |
| Schutz vor elektrostatischen Entladungen | Nein |
| Schutz vor Stoßspannungen | Nein |
| Optiktechnologie | F.O.L. |
| Technische Merkmale des Produkts | TVS |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Farbe | Text white RAL9003 |
| Bearbeitungstyp | Pulverbeschichtung mit duroplastischen Pulvern |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | UV beständiges Polycarbonat |
| Farbe | Transparent |

| Oberfläche Oberfläche strahler | |
|---|---|
| Material | Stranggepresstes Aluminium EN AB - 46100 |
| Farbe | Aluminium |
| Bearbeitungstyp | Polieren |

**Elektronik**



89145
On/Off Driver 198~264V AC / 180~275V DC (1 art.)



99375
On/Off Driver 198~264V AC (1 - 3 art.)

| Cables Electrification | |
|---|---|
| Cable connector | No |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Downlights | 1 x powerLED 4 W DC 350 mA | CRI 80
**90732M60**

Single emission recessed downlights for indoor application. The super warm white LED light source is composed of 1 powerled LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 490 lm, with a 122.5 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium en ab - 46100 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP44; the total weight is of 0.078 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 4 W The power supply cable is included and features a 0.170 m length.

The device features protection class III and can be ceiling-mounted, with a 29 mm diameter hole (in plasterboard).

Compliant with the EN 60598-1 standard and its specific provisions.


| Energieeffizienzklasse |
|---|
| Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E. |


| Illuminotechnical Eigenschaften | |
|---|---|
| Light Output Ratio (LOR) | 59 % |
| Lichtstrom (Lichtquelle) | 490 lm |
| Leuchten Lichtstrom | 291 lm |
| Consumption | 4 W |
| Leuchten Lichtausbeute | 72 lm/W |
| Farbtemperatur | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Black Body Locus | On |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 40°C |

| LED Life / Failure Ratio |
|---|
| L70 B10 C0 716641h (at Tj 65 Ta 25 ) |
| L80 B10 C0 445035h (at Tj 65 Ta 25 ) |
| L90 B10 C0 205461h (at Tj 65 Ta 25 ) |


| UGR | |
|---|---|
| UGR axial | 27.3 |
| UGR transversal | 27.3 |
| X=4H \| Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |


| OPTICAL | |
|---|---|
| Optik C0/C180 | 50° |
| Light distribution simmetry | Symmetrical |

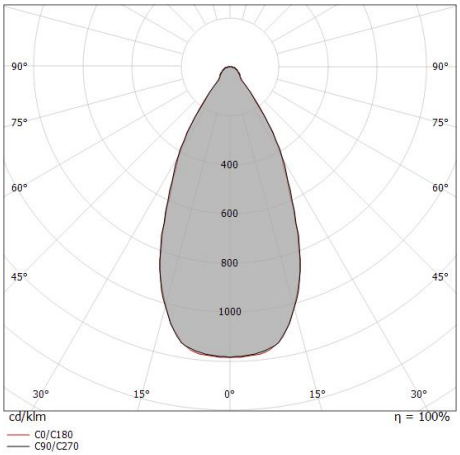

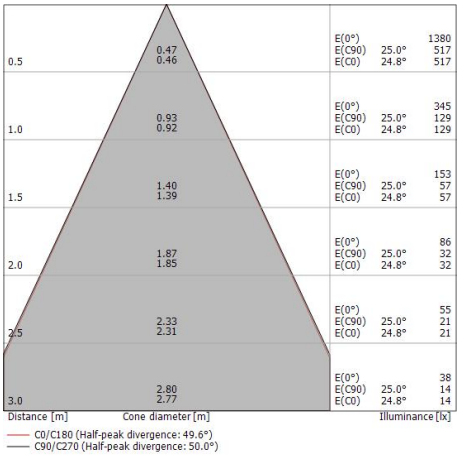
COLOR VECTOR GRAPHIC





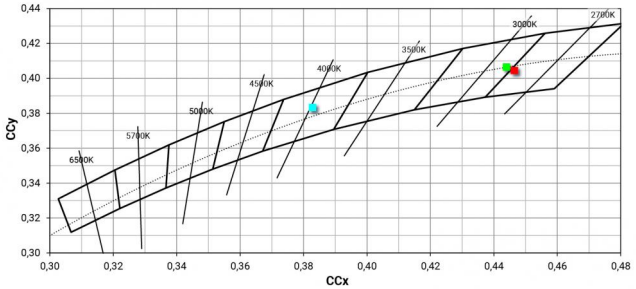


Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.