


Systeme | 198-264 V AC /176-280 V DC
120 topLED 42 W DC - 45 W AC | Modular | CRI 80
90929N69



Technische Daten	
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Double Asymmetric
Light emission direction	downward
Lampe Nennleistung	42 W DC
Gesamtleistung	45 W
Lichtstrom (Lichtquelle)	6186 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	2.254 Kg
Modularity	Modular
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PMMA

Systeme | 198-264 V AC /176-280 V DC | 120 topLED 42 W DC - 45 W AC | Modular | CRI 80
90929N69

Single emission systems for indoor application. The natural white LED light source with a double asymmetric light distribution is composed of 120 topLED LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 6186 lm, with a 147.3 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text white ral9003 finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP20; the total weight is of 2.254 kg.

The total absorbed power is 45 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

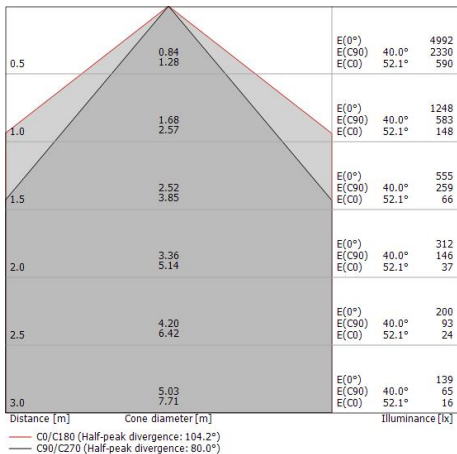
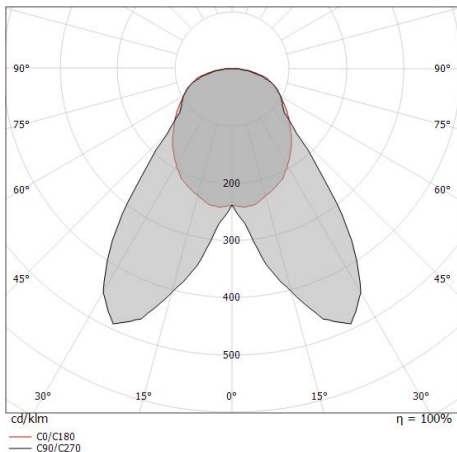
Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	84 %
Lichtstrom (Lichtquelle)	6186 lm
Leuchten Lichtstrom	5236 lm
Consumption	45 W
Leuchten Lichtausbeute	116 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio
L70 B20 C0 36000h





UGR	
UGR axial	25.9
UGR transversal	27.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	80°
Optik C0/C180	104°
Light distribution simmetry	Symmetrical 2 assis



Systeme | 198-264 V AC /176-280 V DC | 120 topLED 42 W DC - 45 W AC | Modular | CRI 80
90929N69



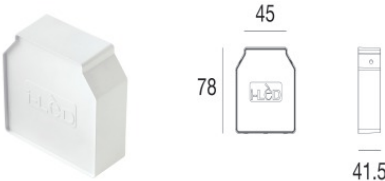
Components

 	Trail Power Module backbone 7 poles ON/OFF DALI - Sistemi	Code <u>90913</u>
 	Trail Power Module backbone 7 poles ON/OFF DALI - Sistemi	Code <u>90917</u>
 	Trail standard backbone 7 poles ON/OFF-DALI	Code <u>90909</u>
 	Trail standard backbone 7 poles ON/OFF-DALI - Sistemi	Code <u>90905</u>
 	Trail Three-phase adapter	Code <u>90952</u>
 	Trail Power module backbone 3 poles ON/OFF	Code <u>90915 - 90911</u>
 	Trail standard backbone 3 poles ON/OFF	Code <u>90903 - 90907</u>
 	Trail Auxiliary power backbone 7 poles ON/OFF	Code <u>90905E</u>

Système | 198-264 V AC /176-280 V DC | 120 topLED 42 W DC - 45 W AC | Modular | CRI 80
90929N69

Components

Trail_line 7 poles DALI | Systems | Accessories
90929N69

	Kabel für Aufhängung	Code <u>90944</u>
	Kabel für Aufhängung	Code <u>90943</u>
	Klammer L=53mm, H=13mm, D=23mm	Code <u>90945</u>
	Endkappe Material:Aluminium, farbe:weiß RAL 9003, bearbeitungstyp :Lackierung.	Code <u>90946</u>
	Profil Material:Aluminium, farbe:Text white RAL9003, bearbeitungstyp :Lackierung.	Code <u>90950</u>