



Wandleuchten - Deckenleuchten | 220-240 V

1 Module 23 W DC - 25 W AC | CRI 80

9172



380

Technische Daten	
Designer	Linea Light
Jahr der Verwirklichung	2020
Typ	Wandleuchten - Oberfläche
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	Modul
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	23 W DC
Gesamtleistung	25 W
Lichtstrom (Lichtquelle)	2500 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	60 - 50 Hz
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP54
IK	IK10
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.360 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja
Ähnlichste Farbtemperatur / Tone	2700 - 3000 - 4000

Oberfläche Oberfläche Gehäuse

Material PMMA

Farbe Weiß

Oberfläche Oberfläche diffusor

Material PMMA

Farbe Opal

Wandleuchten - Deckenleuchten | 220-240 V | 1 Module 23 W DC - 25 W AC | CRI 80 |

Farbtemperatur: 2700 K

9172

Single emission wall lights or ceiling downlights for outdoor application. The natural white LED light source with a diffused light distribution is composed of 1 topped LEDs with CCT of 2700-3000-4000 K and a CRI 80; the source luminous flux is 2500 lm, with a 108.7 lm/W nominal luminous efficacy.

The device body is made of pmma and features a white finish; the diffuser is made of pmma.

The ingress protection degree is IP54; the total weight is of 1.360 kg.

The total absorbed power is 25 W

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C.

Illuminotechnical Eigenschaften


Light Output Ratio (LOR)	89 %
Lichtstrom (Lichtquelle)	2500 lm
Leuchten Lichtstrom	2247 lm
Consumption	25 W
Leuchten Lichtausbeute	89 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio

L70 B20 C0 72500h

OPTICAL

Optik C0/C180	112°
Light distribution simmetry	Symmetrical

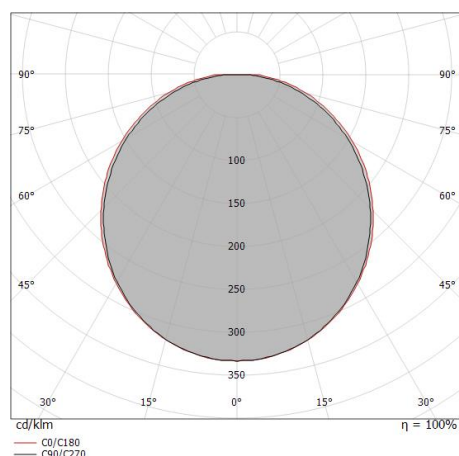

Wandleuchten - Deckenleuchten | 220-240 V | 1 Module 23 W DC - 25 W AC | CRI 80 |

Farbtemperatur: 3000 K

9172

Single emission wall lights or ceiling downlights for outdoor application. The natural white LED light source with a diffused light distribution is composed of 1 topped LEDs with CCT of 2700-3000-4000 K and a CRI 80; the source luminous flux is 2500 lm, with a 108.7 lm/W nominal luminous efficacy.

The device body is made of pmma and features a white finish; the diffuser is made of pmma.

The ingress protection degree is IP54; the total weight is of 1.360 kg.

The total absorbed power is 25 W

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C.

Illuminotechnical Eigenschaften


Light Output Ratio (LOR)	92 %
Lichtstrom (Lichtquelle)	2500 lm
Leuchten Lichtstrom	2317 lm
Consumption	25 W
Leuchten Lichtausbeute	92 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio

L70 B20 C0 72500h

OPTICAL

Optik C0/C180	112°
Light distribution simmetry	Symmetrical

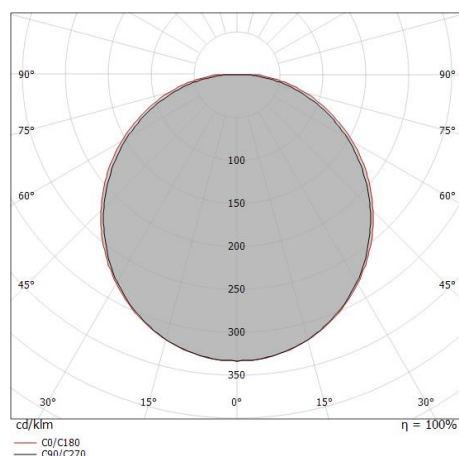

Wandleuchten - Deckenleuchten | 220-240 V | 1 Module 23 W DC - 25 W AC | CRI 80 |

Farbtemperatur: 4000 K

9172

Single emission wall lights or ceiling downlights for outdoor application. The natural white LED light source with a diffused light distribution is composed of 1 topped LEDs with CCT of 2700-3000-4000 K and a CRI 80; the source luminous flux is 2500 lm, with a 108.7 lm/W nominal luminous efficacy.

The device body is made of pmma and features a white finish; the diffuser is made of pmma.

The ingress protection degree is IP54; the total weight is of 1.360 kg.

The total absorbed power is 25 W

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	95 %
Lichtstrom (Lichtquelle)	2500 lm
Leuchten Lichtstrom	2389 lm
Consumption	25 W
Leuchten Lichtausbeute	95 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	-20 / +50°C

LED Life / Failure Ratio

L70 B20 C0 72500h

OPTICAL

Optik C0/C180	112°
Light distribution simmetry	Symmetrical

