

Wandleuchten - Lineare Elemente | 198-264 V | 22 x powerLEDs 48.5 W DC - 54 W AC |
CRI 80
92044W15

Single emission wall lights or lines for outdoor application. The warm white LED light source with a spot light distribution is composed of 22 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 7832 lm, with a 161.5 lm/W nominal luminous efficacy.

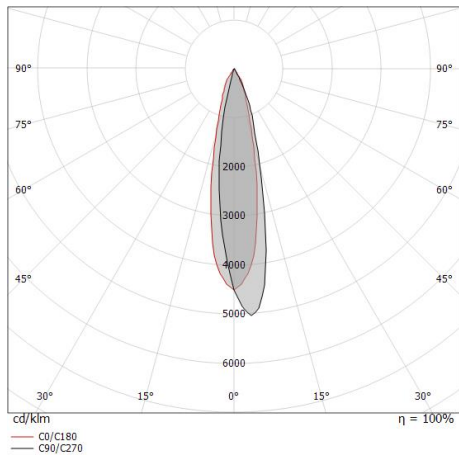
The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 20 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP67; the total weight is of 3.5 kg.

The total absorbed power is 53.5 W The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.



Energieeffizienzklasse

Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	48 %
Lichtstrom (Lichtquelle)	7832 lm
Leuchten Lichtstrom	3780 lm
Consumption	53.5 W
Leuchten Lichtausbeute	70 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 1240219h (at Tj 65 Ta 25)




L80 B10 C0 745627h (at Tj 65 Ta 25)

L90 B10 C0 309367h (at Tj 65 Ta 25)

OPTICAL

Optik C0/C180	23°
Light distribution simmetry	Asymmetrical

Archiline_W Anti-glare | Lines | Accessories
92044W15

	Kabel und Stecker Länge 2000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser: 9.5 mm; farben: blau - braun - gelb-grün.	Code <u>99057</u>
	Kabel und Stecker Länge 5000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser: 9.5 mm; farben: blau - braun - gelb-grün.	Code <u>98147</u>
 	Kabel und Stecker Länge 10000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser: 9.5 mm; farben: blau - braun - gelb-grün.	Code <u>98146</u>
 	Blendschutz Material:Aluminium, farbe:Anodised black aluminium, bearbeitungstyp :Eloxierung.	Code <u>98677</u>
 	Klammer installationsposition: wand L=289.5mm, H=164mm, D=123mm. Material:Verzinktes Eisen, farbe:Text brilliant grey RAL 9006, bearbeitungstyp :Pulverbeschichtung mit duroplastischen Pulvern.	Code <u>83049</u>