

Wandleuchten - Lineare Elemente | 85-277 V | 12 x powerLEDs 13.2 W DC - 14.5 W AC |
RGBW - 3000
92070V15

Single emission wall lights or lines for outdoor application. The RGBW - 3000 K LED light source with a spot light distribution is composed of 12 powered LEDs with CCT of RGB-W 3000 K the source luminous flux is 1035 lm, with a 79.6 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 20 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP67; the total weight is of 1.1 kg.

The total absorbed power is 13.2 W The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.



Energieeffizienzklasse
Dieses Produkt enthält 3 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	862 lm
Consumption	14.5 W
Leuchten Lichtausbeute	59 lm/W
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 247450h

UGR	
UGR axial	17
UGR transversal	17.9
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	15°
Light distribution simmetry	Symmetrical

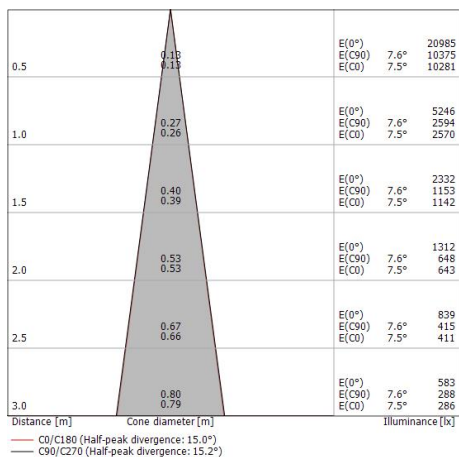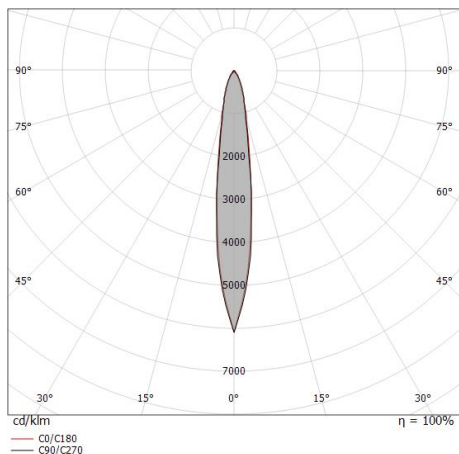

Archiline_W RGBW | Lines | Accessories
92070V15

L. 1m



Kabel und Stecker

Typ Kabel power + signal cable allinone; Länge 1000 mm; isolierung doppio con schermatura per segnale; außendurchmesser: 12.6 mm; farben: weiß - blau - rot - grau - braun - gelb-grün.

Code

98660

L. 5m



Kabel und Stecker

Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale; außendurchmesser: 12.6 mm; farben: weiß - blau - rot - grau - braun - gelb-grün.

Code

98661

L. 1m



Kabel und Stecker

Typ Kabel power + signal cable allinone; Länge 1000 mm; isolierung doppio con schermatura per segnale; außendurchmesser: 12.6 mm.

Code

98662

L. 5m




Kabel und Stecker

Typ Kabel power + signal cable allinone; Länge 5000 mm; isolierung doppio con schermatura per segnale; außendurchmesser: 12.6 mm.

Code

98663




Stecker - Start splitter

Typ Kabel power + signal cable allinone; Länge 5000 + 5000 + 200 mm; isolierung doppio con schermatura per segnale.

Code

98985



Stecker - Continuity splitter

Typ Kabel power + signal cable allinone; Länge 200 + 200 + 5000 mm; isolierung doppio con schermatura per segnale.

Code

99390



Stecker - DMX-Leitungsverschlussadapter für ALLinONE-Kabel

Typ Kabel power + signal cable allinone; ; isolierung doppio con schermatura per segnale.

Code

98986