

Lineare Elemente | 198-264 V | 9 x powerLEDs 19.8 W DC - 22 W AC | CRI 80
92125W27

Single emission lines for outdoor application. The warm white LED light source with a asymmetric wallwasher light distribution is composed of 9 powerled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2718 lm, with a 137.3 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

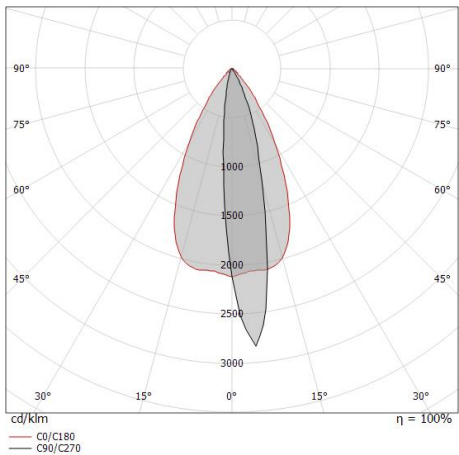
The device body is made of aluminium alloy 6060 and features a anodised black aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance. The product flange is made of steel, a material that ensures high robustness, superior mechanical strength and extended durability, guaranteeing maximum component reliability over time.

The ingress protection degree is IP67; the total weight is of 2.8 kg.

The total absorbed power is 22 W The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be wall lights or floor-mounted with an outer casing, code 98672(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.



Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	83 %
Lichtstrom (Lichtquelle)	2718 lm
Leuchten Lichtstrom	2267 lm
Consumption	22 W
Leuchten Lichtausbeute	103 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 1240219h (at Tj 65 Ta 25)




L80 B10 C0 745627h (at Tj 65 Ta 25)

L90 B10 C0 309367h (at Tj 65 Ta 25)

OPTICAL

Optik C0/C180	55°
Light distribution simmetry	Asymmetrical

Archiline_I | Lines | Accessories
92125W27

	Kabel und Stecker Länge 2000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser: 9.5 mm; farben: blau - braun - gelb-grün.	Code <u>99057</u>
	Kabel und Stecker Länge 5000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser: 9.5 mm; farben: blau - braun - gelb-grün.	Code <u>98147</u>
 	Kabel und Stecker Länge 10000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser: 9.5 mm; farben: blau - braun - gelb-grün.	Code <u>98146</u>
 	Einbaugehäuse installationsposition: wand, boden; typ installation: mauerwerk L=546mm, H=138.3mm, D=100.2mm. Material:Eisen, farbe:Zink, bearbeitungstyp :Verzinken.	Code <u>98672</u>