

Lineare Elemente | 198-264 V | 9 x powerLEDs 19.8 W DC - 22 W AC | CRI 80
92134W15

Single emission lines for outdoor application. The warm white LED light source with a spot light distribution is composed of 9 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2718 lm, with a 137.3 lm/W nominal luminous efficacy.



The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 20 µm anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP67; the total weight is of 2.8 kg.

The total absorbed power is 22 W The power supply cable is included and features a 0.2 m length.

The device features protection class I and can be wall lights or floor-mounted with an outer casing, code 98672(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

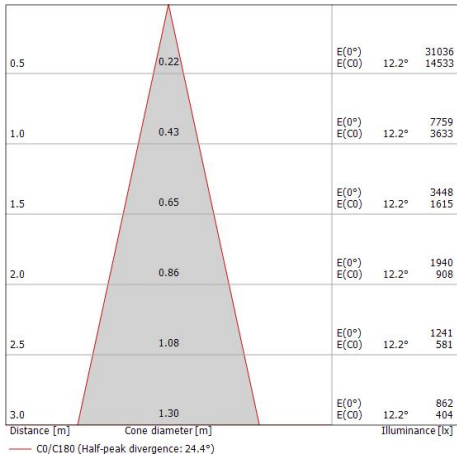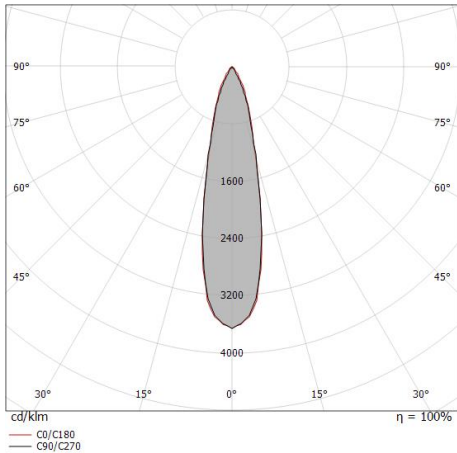

Energieeffizienzklasse	
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.	

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	78 %
Lichtstrom (Lichtquelle)	2718 lm
Leuchten Lichtstrom	2125 lm
Consumption	22 W
Leuchten Lichtausbeute	96 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio	
L70 B10 C0 1240219h (at Tj 65 Ta 25)	
L80 B10 C0 745627h (at Tj 65 Ta 25)	
L90 B10 C0 309367h (at Tj 65 Ta 25)	

UGR	
UGR axial	12.2
UGR transversal	21
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	24°
Light distribution simmetry	Symmetrical

Archiline_A | Lines | Accessories
92134W15




Kabel und Stecker
Länge 2000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser:
9.5 mm; farben: blau - braun - gelb-grün.

Code
99057





Kabel und Stecker
Länge 5000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser:
9.5 mm; farben: blau - braun - gelb-grün.

Code
98147



Kabel und Stecker
Länge 10000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser:
9.5 mm; farben: blau - braun - gelb-grün.

Code
98146



Einbaugehäuse
installationsposition: wand, boden; typ installation: mauerwerk L=546mm, H=138.3mm, D=100.2mm.
Material:Eisen, farbe:Zink, bearbeitungstyp :Verzinken.

Code
98672