


| CRI 80
92138N00

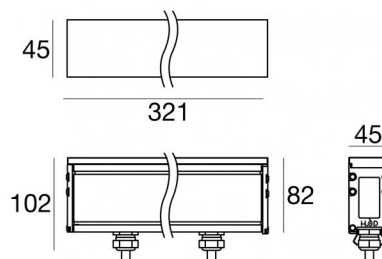

Technische Daten	
Typ	Frameless
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	upward
Lampe Nennleistung	3.6 W DC
Gesamtleistung	5 W
Lichtstrom (Lichtquelle)	504 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	85 - 277 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP67
IK	IK10
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Ja
Überrollbarkeit	5000 Kg
Einschließlich Kabel	Ja
Kabellänge	0.20 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.5 Kg
Schutz vor elektrostatischen Entladungen	4 KV
Schutz vor Stoßspannungen	6 KV
Optiktechnologie	Dot free
Technische Merkmale des Produkts	Acquastop

Oberfläche Oberfläche Gehäuse

Material	Aluminiumlegierung 6060
Farbe	Anodised black aluminium
Bearbeitungstyp	Anodisierung 15 µm

Oberfläche Oberfläche diffusor

Material	Gehärtetes Glas
Farbe	Weiß matt
Bearbeitungstyp	Anti-Rutsch-Lackierung

Cables Electrification

Cable connector	Female Socket 3 Pin
IP (locked condition)	68

IP (locked condition) 68

Cable connector	Male Plug 3 pin
-----------------	-----------------

| CRI 80
92138N00

Single emission lines for outdoor application. The natural white LED light source with a diffused light distribution is composed of 42 topped LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 504 lm, with a 168.0 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The device body is made of aluminium alloy 6060 and features a anodised black aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of glass - tempered with a anti-slip painting treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP67; the total weight is of 1.5 kg.

The total absorbed power is 5 W The power supply cable is included and features a 0.20 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98724(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	20 %
Lichtstrom (Lichtquelle)	504 lm
Leuchten Lichtstrom	104 lm
Consumption	5 W
Leuchten Lichtausbeute	20 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 145600h (at Tj 65 Ta 25)

L80 B10 C0 92440h (at Tj 65 Ta 25)

L90 B10 C0 45500h (at Tj 65 Ta 25)

UGR

UGR axial	20
UGR transversal	23.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

| CRI 80
92138N00

Single emission lines for outdoor application. The natural white LED light source with a diffused light distribution is composed of 42 topped LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 504 lm, with a 168.0 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.



The device body is made of aluminium alloy 6060 and features a anodised black aluminium finish, processed by means of 15 µm anodizing; the diffuser is made of glass - tempered with a anti-slip painting treatment. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP67; the total weight is of 1.5 kg.

The total absorbed power is 5 W The power supply cable is included and features a 0.20 m length.

The device features protection class I and can be floor-mounted with an outer casing, code 98724(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

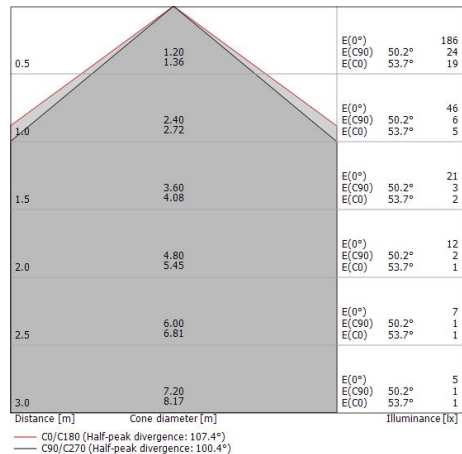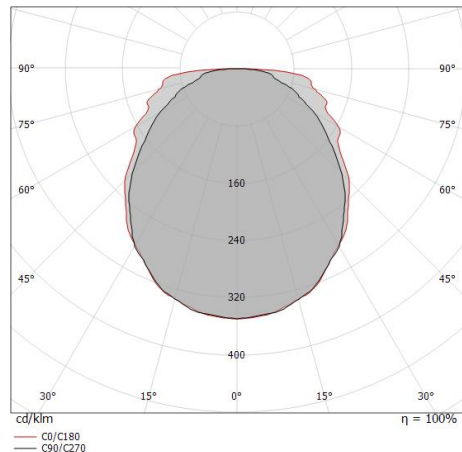

Energieeffizienzklasse	
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.	



Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	26 %
Lichtstrom (Lichtquelle)	504 lm
Leuchten Lichtstrom	133 lm
Consumption	5 W
Leuchten Lichtausbeute	26 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio	
L70 B10 C0 145600h (at Tj 65 Ta 25)	
L80 B10 C0 92440h (at Tj 65 Ta 25)	
L90 B10 C0 45500h (at Tj 65 Ta 25)	

UGR	
UGR axial	20
UGR transversal	23.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	100°
Optik C0/C180	107°
Light distribution simmetry	Symmetrical 2 assis

Archiline_FL | Lines | Accessories
92138N00

	Kabel und Stecker Länge 2000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser: 9.5 mm; farben: blau - braun - gelb-grün.	Code <u>99057</u>
	Kabel und Stecker Länge 5000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser: 9.5 mm; farben: blau - braun - gelb-grün.	Code <u>98147</u>
 	Kabel und Stecker Länge 10000 mm; isolierung doppio; querschnitt 1.5 mm²; kabelklemme: nein; außendurchmesser: 9.5 mm; farben: blau - braun - gelb-grün.	Code <u>98146</u>
 	Einbaugehäuse installationsposition: boden; typ installation: mauerwerk L=320mm, H=140mm, D=75mm. Material:Aluminiumlegierung 6060, farbe:Anodised black aluminium, bearbeitungstyp :Anodisierung 15 µm.	Code <u>98724</u>
	Schlüssel	Code <u>98957</u>