


Wandleuchten | 198-264 V AC /180-275 V DC
2 x powerLED 4 W DC - 5.5 W AC | CRI 80
92239N70

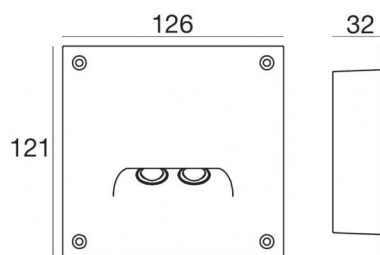

Technische Daten	
Installationsposition	Wand
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Asymmetric Wallwasher
Light emission direction	downward
Lampe Nennleistung	4 W DC
Gesamtleistung	5.5 W
Lichtstrom (Lichtquelle)	498 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP65
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.41 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	0.5 KV

Oberfläche Oberfläche Gehäuse

Material	Aluminium
Farbe	Text brilliant grey RAL 9006
Bearbeitungstyp	Offenporige Anodisierung + Pulverlackierung

Oberfläche Oberfläche diffusor

Material	Extra-helles Glas
Farbe	Transparent

Wandleuchten | 198-264 V AC /180-275 V DC | 2 x powerLED 4 W DC - 5.5 W AC | CRI 80
92239N70

Single emission wall lights for outdoor application. The natural white LED light source with a asymmetric wallwasher light distribution is composed of 2 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 498 lm, with a 124.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text brilliant grey ral 9006 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP65; the total weight is of 0.41 kg.

The total absorbed power is 5.5 W The power supply cable is included and features a 1 m length.

The device features protection class I and can be wall lights-mounted with an outer casing, code 98050(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	77 %
Lichtstrom (Lichtquelle)	498 lm
Leuchten Lichtstrom	387 lm
Consumption	5.5 W
Leuchten Lichtausbeute	70 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio


L70 B10 C0 1240219h (at Tj 65 Ta 25)

L80 B10 C0 745627h (at Tj 65 Ta 25)


L90 B10 C0 309367h (at Tj 65 Ta 25)

OPTICAL

Optik C0/C180	90°
Light distribution simmetry	Asymmetrical

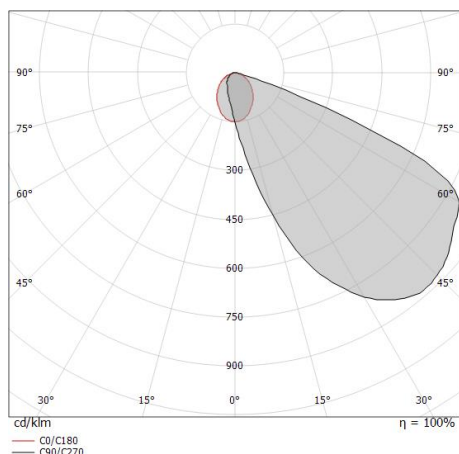

Quara_QI | Wall Lights | Accessories
92239N70

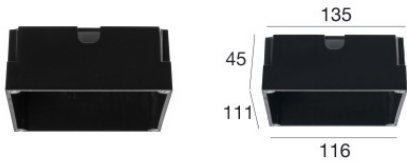

Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=111mm, H=116mm, D=45mm.
Material:Kunststoff ABS, farbe:Black.

Code
98050