


Wandleuchten | 198-264 V AC /180-275 V DC  
2 x powerLED 4 W DC - 5.5 W AC | CRI 80  
**92239W70**

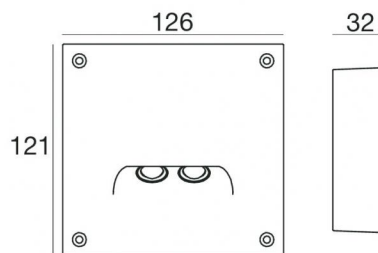

| Technische Daten                                    |                       |
|-----------------------------------------------------|-----------------------|
| Installationsposition                               | Wand                  |
| Installationsumgebung                               | Outdoor               |
| Lichtquelle                                         | LED                   |
| Circuit structure                                   | powerLED              |
| Optik                                               | Asymmetric Wallwasher |
| Light emission direction                            | downward              |
| Lampe Nennleistung                                  | 4 W DC                |
| Gesamtleistung                                      | 5.5 W                 |
| Lichtstrom (Lichtquelle)                            | 466 lm                |
| Nominale Eingangsspannung                           | 220 - 240 V AC        |
| Eingangsspannungsbereich                            | 198 - 264 V AC        |
| Frequency                                           | 50 - 60 Hz            |
| Ähnlichste Farbtemperatur / Tone                    | 3000 K                |
| Farbwiedergabeindex                                 | 80 Ra                 |
| Gleichstrom/Gleichspannung                          | AC                    |
| Isolierklasse                                       | 1                     |
| IP                                                  | IP65                  |
| IK                                                  | IK08                  |
| Glühdrahtprüfung                                    | 850°                  |
| Direkte Montage auf normal entflammaren Oberflächen | Ja                    |
| CE                                                  | Ja                    |
| Einschließlich Driver                               | Driver                |
| Leuchte dimmbar                                     | Nein                  |
| Schwenkbarkeit                                      | Nein                  |
| Drehbarkeit                                         | Nein                  |
| Begehbarkeit                                        | Nein                  |
| Überrollbarkeit                                     | Nein                  |
| Einschließlich Kabel                                | Ja                    |
| Kabellänge                                          | 1 m                   |
| Harzbeschichtung                                    | Ja                    |
| Typ Lichtabstrahlung                                | Einflammig            |
| Nettogewicht                                        | 0.41 Kg               |
| Schutz vor elektrostatischen Entladungen            | Ja                    |
| Schutz vor Stoßspannungen                           | 0.5 KV                |

**Oberfläche Oberfläche Gehäuse**

|                 |                                             |
|-----------------|---------------------------------------------|
| Material        | Aluminium                                   |
| Farbe           | Text brilliant grey RAL 9006                |
| Bearbeitungstyp | Offenporige Anodisierung + Pulverlackierung |

**Oberfläche Oberfläche diffusor**

|          |                   |
|----------|-------------------|
| Material | Extra-helles Glas |
| Farbe    | Transparent       |

Wandleuchten | 198-264 V AC /180-275 V DC | 2 x powerLED 4 W DC - 5.5 W AC | CRI 80  
92239W70

Single emission wall lights for outdoor application. The warm white LED light source with a asymmetric wallwasher light distribution is composed of 2 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 466 lm, with a 116.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text brilliant grey ral 9006 finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP65; the total weight is of 0.41 kg.

The total absorbed power is 5.5 W The power supply cable is included and features a 1 m length.

The device features protection class I and can be wall lights-mounted with an outer casing, code 98050(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

| Energieeffizienzklasse                                              |
|---------------------------------------------------------------------|
| Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D. |


| Illuminotechnical Eigenschaften       |             |
|---------------------------------------|-------------|
| Light Output Ratio (LOR)              | 77 %        |
| Lichtstrom (Lichtquelle)              | 466 lm      |
| Leuchten Lichtstrom                   | 363 lm      |
| Consumption                           | 5.5 W       |
| Leuchten Lichtausbeute                | 66 lm/W     |
| Farbtemperatur                        | 3000 K      |
| Standard Deviation of Colour Matching | 1.5 Step    |
| Farbwiedergabeindex                   | 80 Ra       |
| Standardumgebungstemperatur           | -20 / +50°C |
| Typische Temperatur am Glas           | 40°C        |

| LED Life / Failure Ratio              |
|---------------------------------------|
| L70 B10 C0 1240219h (at Tj 65 Ta 25 ) |
| L80 B10 C0 745627h (at Tj 65 Ta 25 )  |
| L90 B10 C0 309367h (at Tj 65 Ta 25 )  |

| OPTICAL                     |              |
|-----------------------------|--------------|
| Optik C0/C180               | 90°          |
| Light distribution simmetry | Asymmetrical |

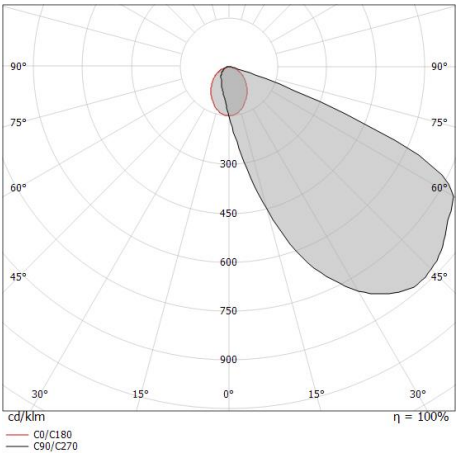

Quara\_QI | Wall Lights | Accessories  
92239W70

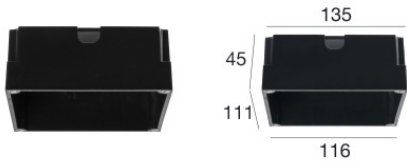

Einbaugehäuse  
installationsposition: wand; typ installation: mauerwerk L=111mm, H=116mm, D=45mm.  
Material:Kunststoff ABS, farbe:Black.

Code  
98050