


Wandleuchten | 198-264 V AC /180-275 V DC
2 x powerLED 4 W DC - 5.5 W AC | CRI 80
92240W70

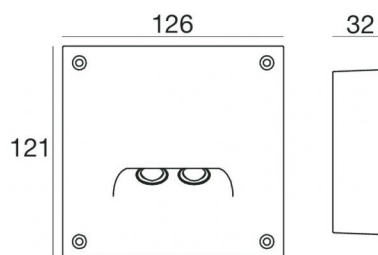

Technische Daten	
Installationsposition	Wand
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Asymmetric Wallwasher
Light emission direction	downward
Lampe Nennleistung	4 W DC
Gesamtleistung	5.5 W
Lichtstrom (Lichtquelle)	466 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP65
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.41 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	0.5 KV

Oberfläche Oberfläche Gehäuse

Material	Aluminium
Farbe	Dark brown
Bearbeitungstyp	Offenporige Anodisierung + Pulverlackierung

Oberfläche Oberfläche diffusor

Material	Extra-helles Glas
Farbe	Transparent

Wandleuchten | 198-264 V AC /180-275 V DC | 2 x powerLED 4 W DC - 5.5 W AC | CRI 80
92240W70

Single emission wall lights for outdoor application. The warm white LED light source with a asymmetric wallwasher light distribution is composed of 2 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 466 lm, with a 116.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a dark brown finish, processed by means of open pore anodizing + powder coating; the diffuser is made of extra clear glass. Surface treatment of the product body through aluminum chemical conversion, followed by polyester powder coating, using exclusively coatings compliant with the Qualicoat standard.

The ingress protection degree is IP65; the total weight is of 0.41 kg.

The total absorbed power is 5.5 W The power supply cable is included and features a 1 m length.

The device features protection class I and can be wall lights-mounted with an outer casing, code 98050(for concrete or masonry).


Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält 2 Lichtquellen der Energieeffizienzklasse D.


Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	68 %
Lichtstrom (Lichtquelle)	466 lm
Leuchten Lichtstrom	320 lm
Consumption	5.5 W
Leuchten Lichtausbeute	58 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio
L70 B10 C0 1240219h (at Tj 65 Ta 25)
L80 B10 C0 745627h (at Tj 65 Ta 25)
L90 B10 C0 309367h (at Tj 65 Ta 25)

OPTICAL	
Optik C0/C180	79°
Light distribution simmetry	Asymmetrical

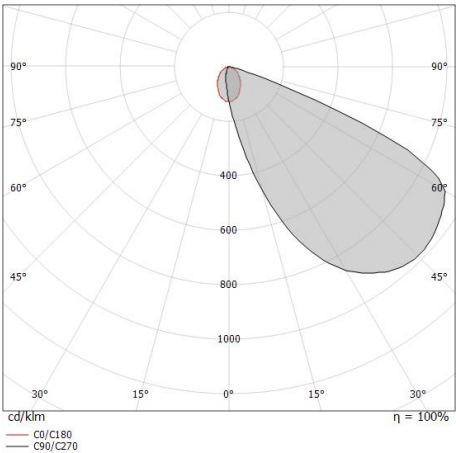

Quara_QI | Wall Lights | Accessories
92240W70

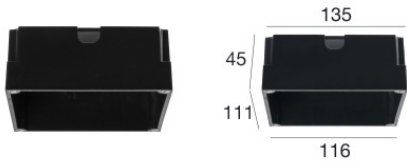

Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=111mm, H=116mm, D=45mm.
Material:Kunststoff ABS, farbe:Black.

Code
98050