


Wandleuchten - Step-Leuchten  
1 x powerLED 1 W DC 350 mA | CRI 80  
**92326M05**

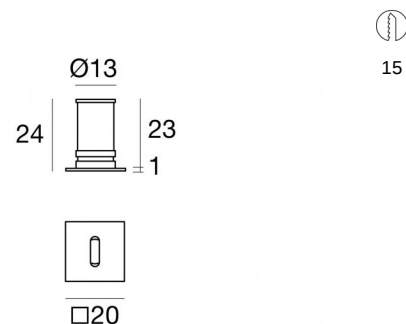

| Technische Daten                                    |                            |
|-----------------------------------------------------|----------------------------|
| Typ                                                 | Oberfläche - Step-Leuchten |
| Installationsposition                               | Wand - Decke               |
| Installationsumgebung                               | Indoor                     |
| Lichtquelle                                         | LED                        |
| Circuit structure                                   | powerLED                   |
| Optik                                               | Ultra Spot                 |
| Light emission direction                            | frontal                    |
| Lampe Nennleistung                                  | 1 W DC                     |
| Lichtstrom (Lichtquelle)                            | 98 lm                      |
| Eingangsspannungsbereich                            | 350mA                      |
| Ähnlichste Farbtemperatur / Tone                    | 2700 K                     |
| Farbwiedergabeindex                                 | 80 Ra                      |
| Gleichstrom/Gleichspannung                          | CC                         |
| Isolierklasse                                       | 3                          |
| IP                                                  | IP20                       |
| Glühdrahtprüfung                                    | 850°                       |
| Direkte Montage auf normal entflammaren Oberflächen | Ja                         |
| CE                                                  | Ja                         |
| Einschließlich Driver                               | Nein                       |
| Leuchte dimmbar                                     | DALI - 1-10V               |
| Schwenkbarkeit                                      | Nein                       |
| Drehbarkeit                                         | Nein                       |
| Begehrbarkeit                                       | Nein                       |
| Überrollbarkeit                                     | Nein                       |
| Einschließlich Kabel                                | Ja                         |
| Kabellänge                                          | 0.12 m                     |
| Harzbeschichtung                                    | Nein                       |
| Einbautiefe                                         | 23 mm                      |
| Typ Lichtabstrahlung                                | Einflammig                 |
| Nettogewicht                                        | 0.016 Kg                   |
| Schutz vor elektrostatischen Entladungen            | Nein                       |
| Schutz vor Stoßspannungen                           | Nein                       |
| Technische Merkmale des Produkts                    | TVS                        |

#### Oberfläche Oberfläche Gehäuse

|                 |                                         |
|-----------------|-----------------------------------------|
| Material        | Aluminiumlegierung 6026                 |
| Farbe           | Brushed nickel                          |
| Bearbeitungstyp | Elektrolytische Vernickelung + Bürstung |

#### Oberfläche Oberfläche diffusor

|          |                                     |
|----------|-------------------------------------|
| Material | Polymethylmethacrylat UV-beständige |
| Farbe    | Transparent                         |

#### Elektronik

 89144  
On/Off Driver 198-264V AC / 180-275V DC (1 - 2 art.)

 89145  
On/Off Driver 198-264V AC / 180-275V DC (3 - 6 art.)

 99375  
On/Off Driver 198-264V AC (6 - 12 art.)

#### Cables Electrification

Cable connector No

Wandleuchten - Step-Leuchten | 1 x powerLED 1 W DC 350 mA | CRI 80  
**92326M05**

Single emission wall lights for indoor application. The super warm white LED light source with a ultra spot light distribution is composed of 1 powerled LEDs with CCT of 2700 K and a CRI 80; the source luminous flux is 98 lm, with a 98.0 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6026 and features a brushed nickel finish, processed by means of galvanic nickel plating + brushing; the diffuser is made of uv resistant polymethylmethacrylate.

The ingress protection degree is IP20; the total weight is of 0.016 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1 W The power supply cable is included and features a 0.12 m length.

The device features protection class III and can be wall lights or ceiling-mounted, with a 15 mm diameter hole (in plasterboard) with an outer casing, code 84335(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

#### Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

#### Illuminotechnical Eigenschaften

|                                       |               |
|---------------------------------------|---------------|
| Lichtstrom (Lichtquelle)              | 98 lm         |
| Farbtemperatur                        | 2700 K        |
| Standard Deviation of Colour Matching | 1/16 ANSI BIN |
| Farbwiedergabeindex                   | 80 Ra         |
| Standardumgebungstemperatur           | -20 / +50°C   |
| Typische Temperatur am Glas           | 40°C          |

#### LED Life / Failure Ratio

L70 B10 C0 200000h (at Tj 60 Ta 25 )

L80 B10 C0 130000h (at Tj 60 Ta 25 )

L90 B10 C0 60000h (at Tj 60 Ta 25 )

Petit\_Q | Step Lights | Accessories  
92326M05



Einbaugehäuse  
installationsposition: wand; typ installation: mauerwerk L=35mm, H=20mm, D=20mm.  
Material:Kunststoff ABS, farbe:Black.

Code  
84335