Mini Tube

Lineare Elemente | 198-264 V
20 topLED 4.5 W DC - 5.2 W AC | CRI 80
92392W00

MARINE GRADE



Technische Daten	
Typ	Oberfläche
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Lampe Nennleistung	4.5 W DC
Gesamtleistung	5.2 W
Lichtstrom (Lichtquelle)	586 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	198 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP65
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.09 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	UV beständiges Polycarbonat
Farbe	Opal

Oberfläche Oberfläche diffusor	
Material	UV beständiges Polycarbonat
Farbe	Opal

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 198-264 V | 20 topLED 4.5 W DC - 5.2 W AC | CRI 80
92392W00

Single emission lines for outdoor application. The warm white LED light source with a diffused light distribution is composed of 20 topled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 586 lm, with a 130.2 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The device body is made of uv resistant polycarbonate and features a opaline finish; the diffuser is made of uv resistant polycarbonate.

The ingress protection degree is IP65; the total weight is of 0.09 kg.

The total absorbed power is 5.2 W The power supply cable is included and features a 1 m length.

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

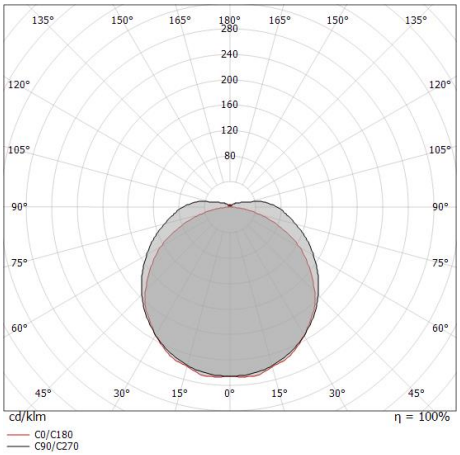

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	79 %
Lichtstrom (Lichtquelle)	586 lm
Leuchten Lichtstrom	465 lm
Consumption	5.2 W
Leuchten Lichtausbeute	89 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	35°C

LED Life / Failure Ratio
L70 B10 C0 494435h (at Tj 65 Ta 25)
L80 B10 C0 310287h (at Tj 65 Ta 25)
L90 B10 C0 147586h (at Tj 65 Ta 25)

OPTICAL	
Optik C90/C270	133°
Optik C0/C180	116°
Light distribution simmetry	Symmetrical 2 assis

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Mini Tube | Lines | Accessories
92392W00

Stecker - Schnellkupplung ON-OFF Buchse / Stecker IP68 (2 Pole)
Typ Kabel power cable; ; isolierung einzeln; querschnitt 1 mm²; kabelklemme: ja.

Code
98729

Kabel
Typ Kabel power cable; ; isolierung einzeln; querschnitt 1 mm²; kabelklemme: pg7; farben: blau - braun.

Code
99229

Befestigungssatz - Clipfeder-Set aus Polycarbonat für Mini-Tube (2x) – im Lieferumfang enthalten
Material:UV beständiges Polycarbonat, farbe:Transparent.

Code
Included Fixing Clips

Befestigungssatz - Clipfedersatz für Mini-Tube aus vernickeltem Harmonic-Stahl (2x)

Code
98710

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.