
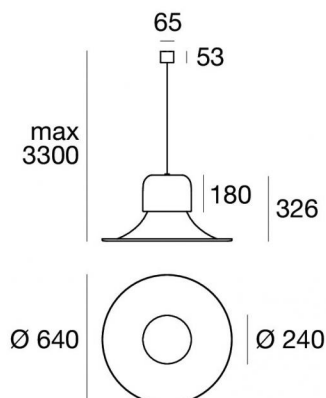


Pendelleuchte | 220-240 V
64 topLED 28 W DC - 31 W AC | CRI 90
9300



Technische Daten	
Designer	Stilnovo
Jahr der Verwirklichung	1969
Typ	Pendelleuchte
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	28 W DC
Gesamtleistung	31 W
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2700 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI-2 - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	3 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	3.600 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Polished limestone (R9002)
Bearbeitungstyp	Lackierung
Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Opal
Oberfläche Oberfläche fassung	
Material	Metall
Farbe	Polished black (R9005)
Bearbeitungstyp	Lackierung

Pendelleuchte | 220-240 V | 64 topLED 28 W DC - 31 W AC | CRI 90
9300

Single emission pendant luminaires for indoor application. The super warm white LED light source with a diffused light distribution is composed of 64 topLEDs with CCT of 2700 K and a CRI 90.


The device body is made of aluminium and features a polished limestone (r9002) finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of metal, with a polished black (r9005) finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 3.600 kg.

The total absorbed power is 31 W The power supply cable is included and features a 3 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

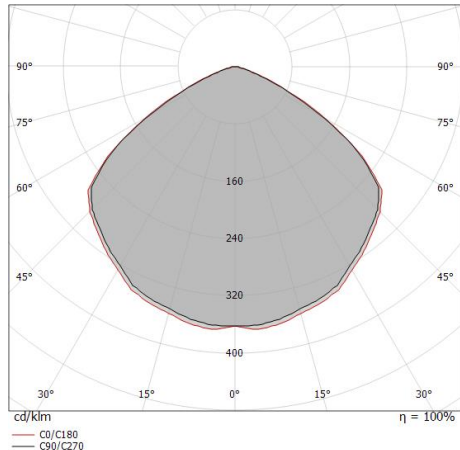

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.55 1.56	E(0°) 2676 E(C90) 214 E(C0) 216
1.0	3.10 3.12	E(0°) 669 E(C90) 54 E(C0) 54
1.5	4.66 4.67	E(0°) 297 E(C90) 24 E(C0) 24
2.0	6.21 6.23	E(0°) 167 E(C90) 13 E(C0) 14
2.5	7.76 7.79	E(0°) 107 E(C90) 9 E(C0) 9
3.0	9.31 9.35	E(0°) 74 E(C90) 6 E(C0) 6

— C0/C180 (Half-peak divergence: 114.6°)
— C90/C270 (Half-peak divergence: 114.4°)

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.


Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	1848 lm
Consumption	31 W
Leuchten Lichtausbeute	59 lm/W
Farbtemperatur	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B10 C0 102000h (at Tj 115 Ta 25)
L90 B10 C0 55000h

UGR	
UGR axial	25.3
UGR transversal	25.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	114°
Light distribution simmetry	Symmetrical

Campana | Pendant Luminaires | Accessories
9300



Dimmer - 0-10V, 1-10V oder DALI-Dimmschnittstelle
Bluetooth, 220-240V

Code
KIT0079