

Dama

Tischleuchten | 1 topLED 1.8 W DC 5 V | CRI 80

9350







Technische Daten	
Jahr der Verwirklichung	2020
Typ	Tischleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	1.8 W DC
Lichtstrom (Lichtquelle)	110 lm
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Touchless Dimmer
Max duration	7.5 h
Charging time	4.5 h
Motion sensor	Ja
Sensivity range	Ø 0.08 m | H 0.05 m
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.15 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.206 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Blau RAL 5024
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	ABS
Farbe	Weiß
Bearbeitungstyp	Satinieren

Cables Electrification	
Cable connector	USB Type A

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Tischleuchten | 1 topLED 1.8 W DC 5 V | CRI 80
9350

Single emission table lamps for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 110 lm, with a 61.1 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a azure ral 5024 finish, processed by means of coating; the diffuser is made of ABS with a satin finishing treatment.

The ingress protection degree is IP20; the total weight is of 1.206 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1.8 W The power supply cable is included and features a 0.15 m length.

The device features protection class III and can be floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	85 %
Lichtstrom (Lichtquelle)	110 lm
Leuchten Lichtstrom	94 lm
Consumption	1,8 W
Leuchten Lichtausbeute	94 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	80 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B20 C0 72500h

OPTICAL	
Optik C90/C270	15°
Optik C0/C180	115°
Light distribution simmetry	Symmetrical 2 assis

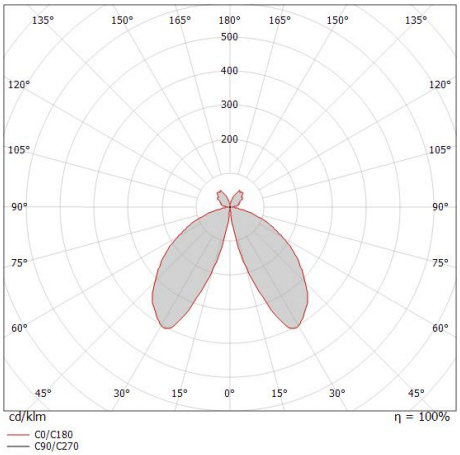

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.