


Lineare Elemente | 90-305 V
12 x powerLEDs 24 W DC - 26 W AC | CRI 80
93605N50

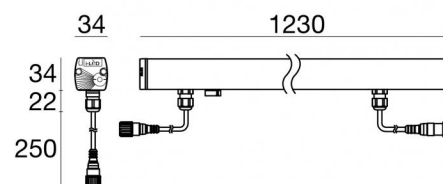

Technische Daten	
Typ	Oberfläche
Installationsposition	Wand - Decke - Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	powerLEDs
Optik	Medium Wide Flood
Light emission direction	upward
Lampe Nennleistung	24 W DC
Gesamtleistung	26 W
Lichtstrom (Lichtquelle)	3192 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	90 - 305 V AC
Frequency	47 - 63 Hz
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP66
IK	IK10
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Orientabile
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.2 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.4 Kg
Schutz vor elektrostatischen Entladungen	4 KV
Schutz vor Stoßspannungen	2 KV
Technische Merkmale des Produkts	TCS - TVS

Oberfläche Oberfläche Gehäuse	
Material	Aluminiumlegierung 6060
Farbe	Anodised aluminium
Bearbeitungstyp	Anodisierung 20 µm
Cables Electrification	
Cable connector	Male Plug 4 pin M12
IP (locked condition)	67
Cable connector	Female Socket 4 Pin M12
IP (locked condition)	67

Lineare Elemente | 90-305 V | 12 x powerLEDs 24 W DC - 26 W AC | CRI 80
93605N50

Single emission lines for outdoor application. The natural white LED light source with a medium wide flood light distribution is composed of 12 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 3192 lm, with a 133.0 lm/W nominal luminous efficacy.

The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 20 µm anodizing. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP66; the total weight is of 1.4 kg.

The total absorbed power is 26 W The power supply cable is included and features a 0.2 m length.

The device features protection class II and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	70 %
Lichtstrom (Lichtquelle)	3192 lm
Leuchten Lichtstrom	2256 lm
Consumption	26 W
Leuchten Lichtausbeute	86 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio

L70 B10 C0 1240219h (at Tj 65 Ta 25)

L80 B10 C0 745627h (at Tj 65 Ta 25)

L90 B10 C0 309367h (at Tj 65 Ta 25)

UGR

UGR axial	22.5
UGR transversal	30
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	46°
Optik C0/C180	133°
Light distribution simmetry	Symmetrical 2 assis

Lineare Elemente | 90-305 V | 12 x powerLEDs 24 W DC - 26 W AC | CRI 80

93605N50

Single emission lines for outdoor application. The natural white LED light source with a medium wide flood light distribution is composed of 12 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 3192 lm, with a 133.0 lm/W nominal luminous efficacy.



The device body is made of aluminium alloy 6060 and features a anodised aluminium finish, processed by means of 20 µm anodizing. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP66; the total weight is of 1.4 kg.

The total absorbed power is 26 W The power supply cable is included and features a 0.2 m length.

The device features protection class II and can be wall lights, ceiling or floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

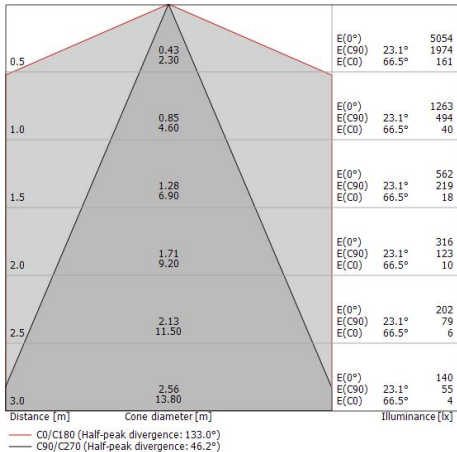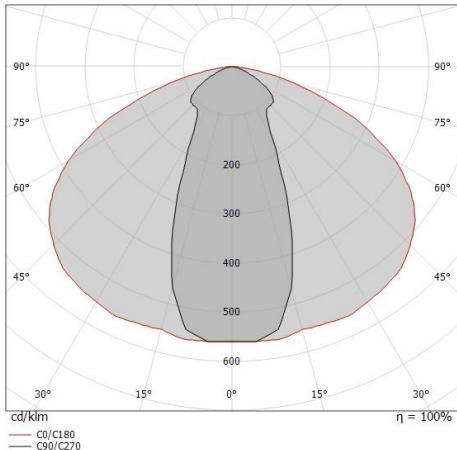

Energieeffizienzklasse	
Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse D.	

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	70 %
Lichtstrom (Lichtquelle)	3192 lm
Leuchten Lichtstrom	2256 lm
Consumption	26 W
Leuchten Lichtausbeute	86 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio	
L70 B10 C0 1240219h (at Tj 65 Ta 25)	
L80 B10 C0 745627h (at Tj 65 Ta 25)	
L90 B10 C0 309367h (at Tj 65 Ta 25)	

UGR	
UGR axial	22.5
UGR transversal	30
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	46°
Optik C0/C180	133°
Light distribution simmetry	Symmetrical 2 assis

Xenia_W | Lines | Accessories
93605N50

 	Klammer installationsposition: wand, decke, boden L=95.6mm, H=45mm, D=28mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code 89045
	Klammer installationsposition: wand, decke, boden L=155.6mm, H=45mm, D=28mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code 89046
	Klammer installationsposition: wand, decke, boden L=305.6mm, H=60mm, D=28mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code 89047
	Klammer installationsposition: wand, decke, boden L=35mm, H=72.8mm, D=36.5mm. Material:Stahl AISI 304, farbe:Scotch Brite Stahl.	Code 98949
	Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 5m) Länge 5000 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.	Code 89190
	Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 5m) Länge 5000 mm; isolierung doppio; kabelklemme: nein.	Code 98149
	Kabel und Stecker - 24V DC 190-250V AC - Conn M. + F. 4 pin M12 (L 10m) Länge 10000 mm; isolierung doppio; kabelklemme: nein.	Code 89188
	Kabel und Stecker - 24V DC 190-250V AC - Conn. F.4 pin M12 (L 1,5m) Länge 1500 mm; isolierung doppio; kabelklemme: nein; farben: weiß - schwarz - blau - braun.	Code 99216

Xenia_W | Lines | Accessories
93605N50



Kabel und Stecker - Verlängerungskabel
Länge 1000 mm; isolierung doppio; kabelklemme: nein.

Code
98437



Blendschutz - Blendschutzblende
Blendschutzart: palpebra.
Material:Aluminiumlegierung 6060, farbe:Anodised aluminium, bearbeitungstyp :Anodisierung 20 µm.

Code
98785