


Lineare Elemente - Industriebeleuchtung | 90-264 V
144 topLED 37 W DC - 40.5 W AC | CRI 92
94910N12

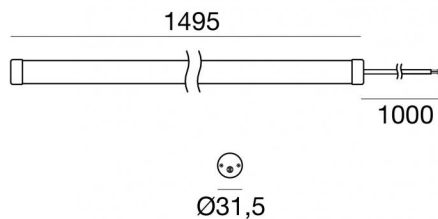

Technische Daten	
Typ	Oberfläche - Industriebeleuchtung
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffused
Lampe Nennleistung	37 W DC
Gesamtleistung	40.5 W
Lichtstrom (Lichtquelle)	4248 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	90 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	4000 K
Farbwiedergabeindex	92 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP40
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.94 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Anodised aluminium
Bearbeitungstyp	Eloxierung

Oberfläche Oberfläche diffusor	
Material	UV beständiges Polycarbonat
Farbe	Gekräuselt

Lineare Elemente - Industriebeleuchtung | 90-264 V | 144 topLED 37 W DC - 40.5 W AC |
CRI 92
94910N12

Single emission lines for indoor application. The natural white LED light source with a diffused light distribution is composed of 144 topLEDs with CCT of 4000 K and a CRI 92; the source luminous flux is 4248 lm, with a 114.8 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a anodised aluminium finish, processed by means of anodisation; the diffuser is made of uv resistant polycarbonate. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long-term resistance.

The ingress protection degree is IP40; the total weight is of 0.94 kg.

The total absorbed power is 40.5 W The power supply cable is included and features a 1 m length.

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

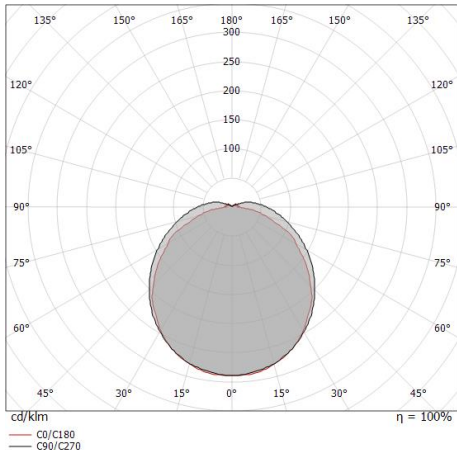

0.5	1.80 1.47	E(0°) E(C90) E(C0)	61.0° 55.7°	4230 241 379
1.0	3.61 2.93	E(0°) E(C90) E(C0)	61.0° 55.7°	1057 60 95
1.5	5.41 4.40	E(0°) E(C90) E(C0)	61.0° 55.7°	470 27 42
2.0	7.22 5.86	E(0°) E(C90) E(C0)	61.0° 55.7°	264 15 24
2.5	9.02 7.33	E(0°) E(C90) E(C0)	61.0° 55.7°	169 10 15
3.0	10.82 8.80	E(0°) E(C90) E(C0)	61.0° 55.7°	117 7 11

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 111.4°)
— C90/C270 (Half-peak divergence: 122.0°)

Energieeffizienzklasse

Dieses Produkt enthält 4 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	86 %
Lichtstrom (Lichtquelle)	4248 lm
Leuchten Lichtstrom	3656 lm
Consumption	40.5 W
Leuchten Lichtausbeute	90 lm/W
Farbtemperatur	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	92 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	35°C

LED Life / Failure Ratio

L70 B10 C0 494435h (at Tj 65 Ta 25)

L80 B10 C0 310287h (at Tj 65 Ta 25)

L90 B10 C0 147586h (at Tj 65 Ta 25)


UGR

UGR axial	29.8
UGR transversal	27.1
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Optik C90/C270	122°
Optik C0/C180	111°
Light distribution simmetry	Symmetrical 2 assis

High Wired | Industrial Lighting | Accessories
94910N12

		Befestigungssatz	Code 99226
		Befestigungssatz	Code 99227
		Befestigungssatz	Code 99228