
High Wired IP44

Lineare Elemente - Industriebeleuchtung | 90-264 V
144 topLED 37 W DC - 40.5 W AC
94913N60



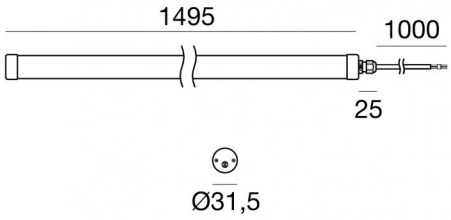

Technische Daten	
Typ	Oberfläche - Industriebeleuchtung
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Gesamtleistung	40.5 W
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	90 - 264 V AC
	50 - 60 Hz
	AC
Isolierklasse	2
IP	IP44
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.94 Kg
Schutz vor elektrostatischen Entladungen	30 KV
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Anodised aluminium
Bearbeitungstyp	Eloxierung

Oberfläche Oberfläche diffusor	
Material	UV beständiges Polycarbonat
Farbe	Gekräuselt

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

High Wired IP44 | Industrial Lighting | Accessories
94913N60





Befestigungssatz

Code
99226






Befestigungssatz

Code
99227






Befestigungssatz

Code
99228





Befestigungssatz - IP66-Anschlussbox

Code
99225

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.