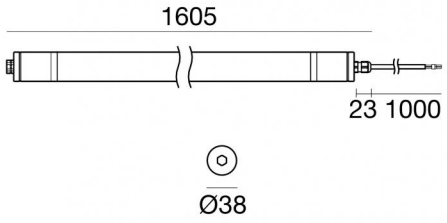
Lineare Elemente | 90-264 V
topLED 37 W DC - 40.5 W AC | CRI 80 | Blau
**95283B30**








| Technische Daten | |
|---|---|
| Typ | Oberfläche |
| Installationsposition | Wand - Decke |
| Installationsumgebung | Outdoor |
| Lichtquelle | LED |
| Circuit structure | topLED |
| Optik | Medium Flood |
| Light emission direction | external |
| Lampe Nennleistung | 37 W DC |
| Gesamtleistung | 40.5 W |
| Lichtstrom (Lichtquelle) | 596 lm |
| Nominale Eingangsspannung | 220 - 240 V AC |
| Eingangsspannungsbereich | 90 - 264 V AC |
| Frequency | 50 - 60 Hz |
| Ähnlichste Farbtemperatur / Tone | Blau |
| Farbwiedergabeindex | 80 Ra |
| Gleichstrom/Gleichspannung | AC |
| Isolierklasse | 2 |
| IP | IP66 |
| IK | IK08 |
| Glühdrahtprüfung | 850° |
| Direkte Montage auf normal entflammbaren Oberflächen | Ja |
| CE | Ja |
| Einschließlich Driver | Driver |
| Leuchte dimmbar | Nein |
| Schwenkbarkeit | Nein |
| Drehbarkeit | Nein |
| Begehbarkeit | Nein |
| Überrollbarkeit | Nein |
| Einschließlich Kabel | Ja |
| Kabellänge | 1 m |
| Harzbeschichtung | Nein |
| Typ Lichtabstrahlung | Einflammig |
| Nettogewicht | 1.57 Kg |
| Schutz vor elektrostatischen Entladungen | 30 KV |
| Schutz vor Stoßspannungen | Ja |
| Technische Merkmale des Produkts | TCS |

| Oberfläche Oberfläche Gehäuse | |
|---|---|
| Material | Aluminium |
| Farbe | Anodised aluminium |
| Bearbeitungstyp | Eloxierung |

| Oberfläche Oberfläche diffusor | |
|---|---|
| Material | UV beständiges Polycarbonat |
| Farbe | Opal |



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Lineare Elemente | 90-264 V | topLED 37 W DC - 40.5 W AC | CRI 80 | Blau
**95283B30**

Single emission lines for outdoor application. The blue LED light source with a medium flood light distribution is composed of 144 topled LEDs and a CRI 80; the source luminous flux is 596 lm, with a 16.1 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a anodised aluminium finish, processed by means of anodisation; the diffuser is made of uv resistant polycarbonate. Surface treatment of the product body with chemical conversion of aluminum, designed to ensure maximum long?term resistance.

The ingress protection degree is IP66; the total weight is of 1.57 kg.

The total absorbed power is 40.5 W The power supply cable is included and features a 1 m length.

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


| **Illuminotechnical Eigenschaften** | |
|---|---|
| Lichtstrom (Lichtquelle) | 596 lm |
| Standard Deviation of Colour Matching | 2 Step MacAdam |
| Farbwiedergabeindex | 80 Ra |
| Standardumgebungstemperatur | -20 / +50°C |
| Typische Temperatur am Glas | 35°C |

| **LED Life / Failure Ratio** |
|---|
| L70 B10 C0 145770h (at Tj 65  Ta 25 ) |




Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

High Protection Wired | Lines | Accessories
**95283B30**


Kabel für Aufhängung - Befestigungssatz für die Aufhängung
Material:Stahl, farbe:Stahl.

**Code**
99219


Befestigungssatz - Befestigungssatz aus transparentem Polycarbonat


**Code**
99222






Befestigungssatz - Clip-Befestigungssatz aus vernickeltem Stahl + O-Ring

**Code**
99220


Befestigungssatz - Clip-Befestigungssatz aus transparentem Polycarbonat + O-Ring

**Code**
99238


Befestigungssatz - IP66-Anschlussbox

**Code**
99225



Stecker - Schnellkupplung ON-OFF Buchse / Stecker IP68 (2 Pole)
Typ Kabel power cable; ; isolierung einzeln; querschnitt 1 mm²; kabelklemme: ja.

**Code**
98729




Kabel
Typ Kabel power cable; ; isolierung einzeln; querschnitt 1 mm²; kabelklemme: pg7; farben: blau - braun.

**Code**
99229



Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.