

Wandleuchten | 198-264 V | 96 topLED 23 W DC - 26 W AC | CRI 90
9645

Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 96 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3552 lm, with a 154.4 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a white ral 9003 finish, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of aluminium, with a white ral 9003 finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 2.100 kg.

The total absorbed power is 26 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	61 %
Lichtstrom (Lichtquelle)	3552 lm
Leuchten Lichtstrom	2168 lm
Consumption	26 W
Leuchten Lichtausbeute	83 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio

L70 B10 C0 102000h (at Tj 115 Ta 25)


L90 B10 C0 55000h

UGR

UGR axial	17
UGR transversal	37.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20


OPTICAL

Optik C90/C270	43°
Optik C0/C180	180°
Light distribution simmetry	Symmetrical 2 assis

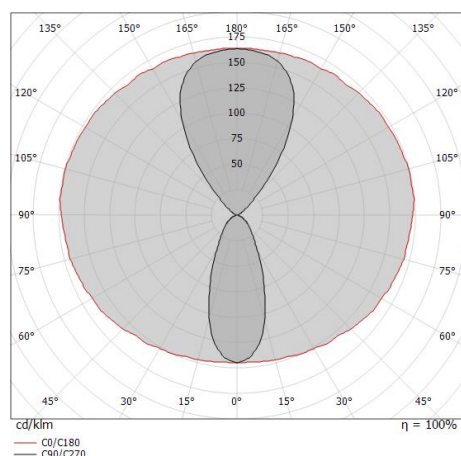


Yo-yo_W | Wall Lights | Accessories

9645



Dimmer - Phasenabschnitt (max. 100 W) – wichtig zum Dimmen der Lampe
220-240V

Code
KIT0026



Dimmer - Phasenabschnitt, CASAMBI - Unverzichtbar zum Dimmen der Lampe mit Casambi
Radio-frequenza, 85-240V

Code
KIT0080