
Tischleuchten | topLED 2.5 W DC 5 V | CRI 90

9652





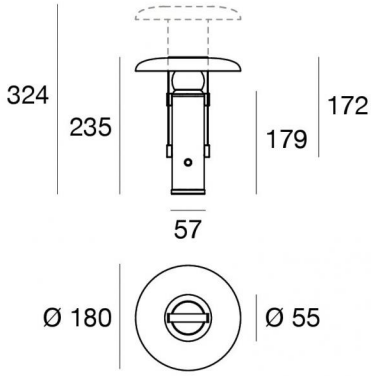

Technische Daten	
Typ	Tischleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	2.5 W DC
Lichtstrom (Lichtquelle) 4000K	200 lm
Minimale Farbtemperatur	4000 K
Lichtstrom (Lichtquelle) 4000K	370 lm
Maximale Farbtemperatur	4000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	DC
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	Touch
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Steckdose	Type C
Kabellänge	1 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.780 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Ähnlichste Farbtemperatur / Tone	1700 - 4000

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Dark brown
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PMMA
Farbe	Transparent

Oberfläche Oberfläche sockel	
Material	Aluminium
Farbe	Dark brown
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Tischleuchten | topLED 2.5 W DC 5 V | CRI 90 | Farbtemperatur: 1700 K
9652

Single emission table lamps for indoor application. The dynamic white LED light source with a diffused light distribution is composed of 12 topled LEDs with CCT of 1700-4000 K and a CRI 90.

The device body is made of aluminium and features a dark brown finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP20; the total weight is of 0.780 kg.

The total absorbed power is 2.5 W The power supply cable is included and features a 1 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.


Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	99 lm
Consumption	2,5 W
Leuchten Lichtausbeute	49 lm/W
Farbtemperatur	1700 K
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B20 C0 50000h (at Tj 115 Ta 25)

UGR	
UGR axial	15.9
UGR transversal	15
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	134°
Light distribution simmetry	Symmetrical

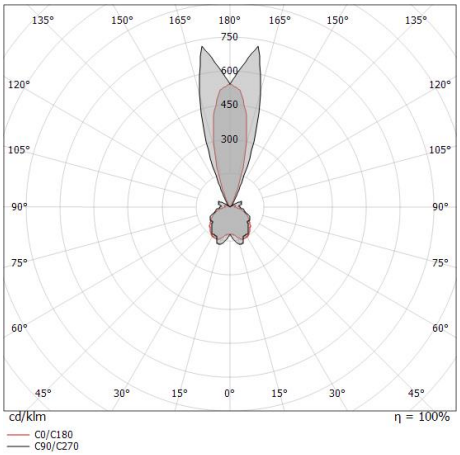

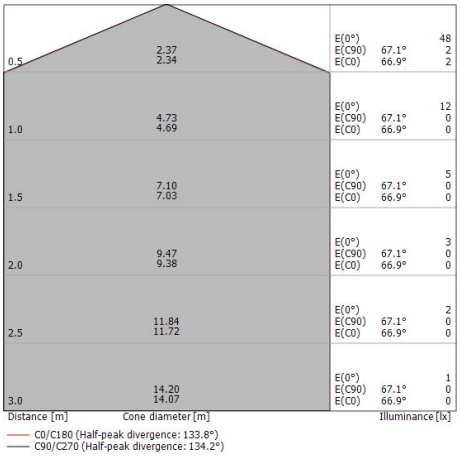

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Tischleuchten | topLED 2.5 W DC 5 V | CRI 90 | Farbtemperatur: 4000 K

9652

Single emission table lamps for indoor application. The dynamic white LED light source with a diffused light distribution is composed of 12 topled LEDs with CCT of 1700-4000 K and a CRI 90.

The device body is made of aluminium and features a dark brown finish, processed by means of coating; the diffuser is made of pmma.

The ingress protection degree is IP20; the total weight is of 0.780 kg.

The total absorbed power is 2.5 W The power supply cable is included and features a 1 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.


Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse G.


Illuminotechnical Eigenschaften	
Leuchten Lichtstrom	140 lm
Consumption	2,5 W
Leuchten Lichtausbeute	70 lm/W
Farbtemperatur	4000 K
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio
L70 B20 C0 50000h (at Tj 115 Ta 25)

UGR	
UGR axial	17.1
UGR transversal	16.3
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	137°
Light distribution simmetry	Symmetrical

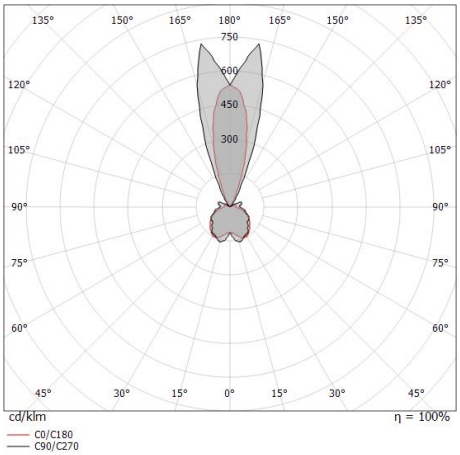

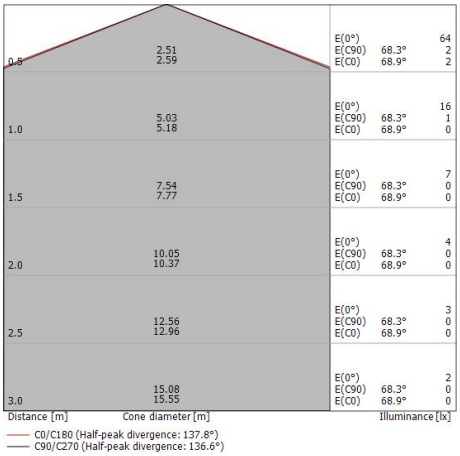

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.