
Meta

Tischleuchten | 220-240 V | 1x18W E27

9698



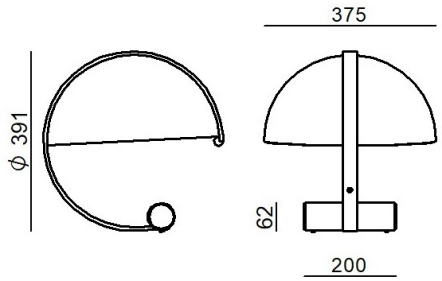

Technische Daten	
Designer	Stilnovo
Jahr der Verwirklichung	1970
Typ	Tischleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Leuchtmittel inbegriffen	Ja
Anschluss der Leuchte	1 x E27
Light emission direction	downward and upward
Frequency	50-60 Hz
Optik	Diffuses
Isolierklasse	2
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Steckdose	Type C
Kabellänge	2 m
Harzbeschichtung	Nein
Nettogewicht	8,500 Kg

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Polished pure white (R9016)
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	Glas

Oberfläche Oberfläche sockel	
Material	Eisen
Farbe	Text white RAL9003
Bearbeitungstyp	Lackierung

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Tischleuchten | 220-240 V | 1x18W E27
9698

Double emission table lamps for indoor application. LED lamplamp included, lamp cap E27 1x20W.

The device body is made of aluminium and features a polished pure white (r9016) finish, processed by means of coating; the diffuser is made of glass.

The ingress protection degree is IP20;

The power supply cable is included and features a 2 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Farbtemperatur	2700 K
Farbwiedergabeindex	80 Ra
Lichtstrom (Lichtquelle)	1 x 2452 lm
Standardumgebungstemperatur	25°C

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.