

Wandleuchten - Step-Leuchten | 1 x powerLED 2 W DC 630 mA | CRI 80
97086W15

Single emission wall lights for outdoor application. The warm white LED light source with a spot light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 249 lm, with a 124.5 lm/W nominal luminous efficacy.



The device body is made of brass ot58 and features a text white ral9003 finish, processed by means of powder coating with thermosetting powders.

The ingress protection degree is IP66; the total weight is of 0.174 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2 W The power supply cable is included and features a 1 m length.

The device features protection class III and can be wall lights-mounted, with a 24 mm diameter hole (in plasterboard) with an outer casing, code 84349(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

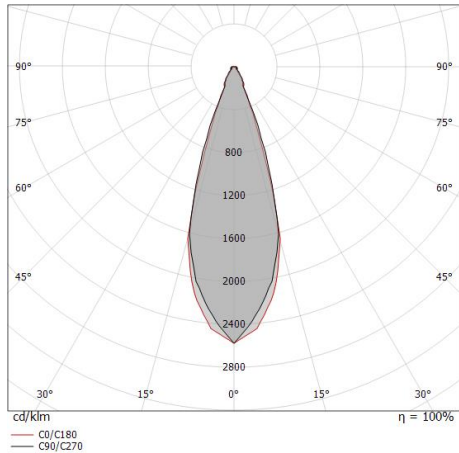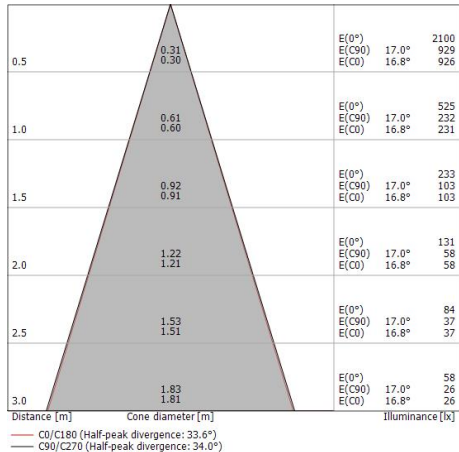

Energieeffizienzklasse	
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D.	

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	81 %
Lichtstrom (Lichtquelle)	249 lm
Leuchten Lichtstrom	204 lm
Consumption	2,0 W
Leuchten Lichtausbeute	102 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	1.5 Step
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
Typische Temperatur am Glas	40°C

LED Life / Failure Ratio	
L70 B10 C0 1240219h (at Tj 65 Ta 25)	
L80 B10 C0 745627h (at Tj 65 Ta 25)	
L90 B10 C0 309367h (at Tj 65 Ta 25)	

UGR	
UGR axial	28.5
UGR transversal	28.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	34°
Light distribution simmetry	Symmetrical

Ilamt66 | Step Lights | Accessories
97086W15



Einbaugehäuse
installationsposition: wand; typ installation: mauerwerk L=42mm, H=30mm, D=30mm.
Material:Kunststoff ABS, farbe:Black.

Code
84349