


Stehleuchten | 220-240 V
topLED 32 W DC - 35 W AC | CRI 90
9816

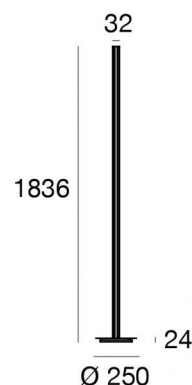

Technische Daten	
Typ	Stehleuchten
Installationsposition	Boden
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	32 W DC
Gesamtleistung	35 W
Lichtstrom (Lichtquelle)	3590 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	220 - 240 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	DALI - PUSH DIM
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	3.5 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	5.200 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	Ja

Oberfläche Oberfläche Gehäuse	
Material	Aluminium
Farbe	Text black RAL9005
Bearbeitungstyp	Lackierung

Oberfläche Oberfläche diffusor	
Material	PC
Farbe	Opal

Oberfläche Oberfläche fassung	
Material	Eisen
Farbe	Text black RAL9005
Bearbeitungstyp	Lackierung

Stehleuchten | 220-240 V | topLED 32 W DC - 35 W AC | CRI 90
9816

Single emission floor lamp for indoor application. The warm white LED light source with a diffused light distribution is composed of 144 topLED LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3590 lm, with a 112.2 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a text black ral9005 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a text black ral9005 finish, processed by means of coating.

The ingress protection degree is IP40; the total weight is of 5.200 kg.

The total absorbed power is 35 W The power supply cable is included and features a 3.5 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	35 %
Lichtstrom (Lichtquelle)	3590 lm
Leuchten Lichtstrom	1268 lm
Consumption	35 W
Leuchten Lichtausbeute	36 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

LED Life / Failure Ratio

L70 B10 C0 102000h (at Tj 115 Ta 25)

L90 B10 C0 55000h

OPTICAL

Optik C0/C180	24°
Light distribution simmetry	Asymmetrical

