


LED Strip | topLED 24 W DC 24 V | 4.8 W/m

270 Lm/m | CRI 80

98342

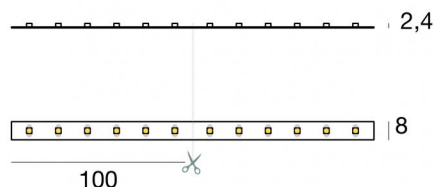

Technische Daten	
Länge	5000 mm
Typ	LED Strip
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Circuit structure	topLED
Lampe Nennleistung	24 W DC
Lampenleistung / m	4.8 W / m
Lichtstrom (Lichtquelle)	1350 lm
Lichtstrom (Lichtquelle) / m	270 lm / m
Ähnlichste Farbtemperatur / Tone	2500 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	0.50 m
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.125 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Technopolymer
Farbe	Weiß
Elektronik	
	99331 On/Off Driver 198~264V AC / 176~275V DC 150 W (1 - 6 art.)
	99332 1-10V Controller (1 - 6 art.)
	99374 On/Off Driver 198~264V AC / 176~275V DC 75 W (1 - 3 art.)
	99787 DALI Controller 100~305V AC / 142~431V DC 240 W (1 - 10 art.)
	83062 DALI - Push and Simply Dim Controller 198~264V AC / V DC (1 - 6 art.)

LED Strip | topLED 24 W DC 24 V | 4.8 W/m | 270 Lm/m | CRI 80
98342

Single emission led strip for indoor application. The super warm white LED light source is composed of 5 striped LEDs with CCT of 2500 K and a CRI 80; the source luminous flux is 1350 lm, with a 56.3 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish.


The ingress protection degree is IP20; the total weight is of 0.125 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 24 W The power supply cable is included and features a 0.50 m length.

The device features protection class III and can be wall lights or ceiling-mounted.



Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	4 %
Lichtstrom (Lichtquelle)	1350 lm
Leuchten Lichtstrom	54 lm
Consumption	1,0 W
Leuchten Lichtausbeute	54 lm/W
Farbtemperatur	2500 K
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-20 / +50°C
OPTICAL	
Optik C0/C180	110°
Light distribution simmetry	Symmetrical

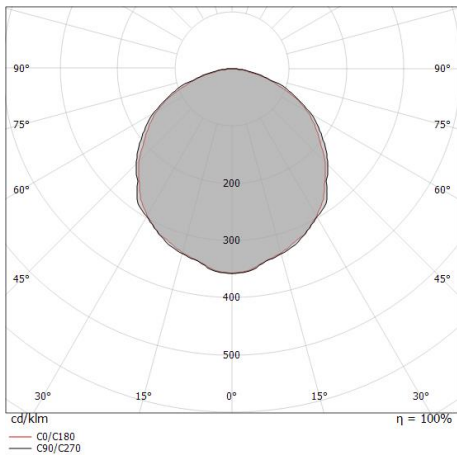




LED Strip | topLED 24 W DC 24 V | 4.8 W/m | 270 Lm/m | CRI 80
98342

Components

		Low Surface Profile	Code <u>98891</u>
		High Surface Profile - Profili Modular	Code <u>98893</u>
		Surface profile - Profilo	Code <u>98923</u>
		High Round Surface Profile - Profilo	Code <u>98933</u>
		Square Surface Profile - Profilo	Code <u>98929</u>
		Corner Surface Profile - Profili Modular	Code <u>98903</u>
		Slim Recessed Profile - Profili Modular	Code <u>98895</u>
		Recessed profile	Code <u>98897</u>

LED Strip | topLED 24 W DC 24 V | 4.8 W/m | 270 Lm/m | CRI 80
98342


Components

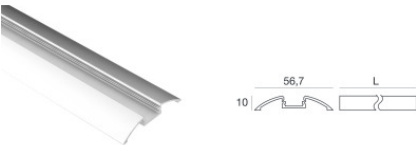	Wall Integrated Linear Profile - Profili Modular	Code <u>98916</u>
	Wall Integrated Corner Profile - Profili Modular	Code <u>98919</u>
	Wall Integrated Side Profile - Profili Modular	Code <u>98921</u>
	Flat Surface Profile - Profili Modular	Code <u>98937</u>
	False-Ceilings Integrated Profile - Profili Modular	Code <u>98906</u>
	Slim Profile Kit - Profilo	Code <u>63560L02</u>

Ribbon Basic 60 LEDs/m | LED Strip | Accessories
98342


	Mehrfachsteckdose	Code 89119
	Kabel und Stecker Länge 300 mm; isolierung einzeln; querschnitt 0,35 mm²; kabelklemme: nein; farben: schwarz - rot.	Code 89121
	Kabel und Stecker Länge 1000 mm; isolierung einzeln; querschnitt 0,35 mm²; kabelklemme: nein; farben: schwarz - rot.	Code 89123
	Kabel und Stecker Länge 3000 mm; isolierung einzeln; querschnitt 0,35 mm²; kabelklemme: nein; farben: schwarz - rot.	Code 89125
	Kabel und Stecker - schnell Anschluss Erweiterung	Code 98384
	Kabel und Stecker - LED-Streifen Schnellverbinder Verlängerung	Code 98379
 	Profil	Code 98061
 	Profil	Code 98066

Ribbon Basic 60 LEDs/m | LED Strip | Accessories
98342



Profil

Code
98392



Profil

Code
98419



Befestigungssatz

Code
98063



Befestigungssatz

Code
98064




Befestigungssatz

Code
98065




Diffusor

Code
98062



Diffusor

Code
98421



Diffusor


Diffusorart: opalen diffusor.
Material:PC, farbe:Opal.

Code
98395

Ribbon Basic 60 LEDs/m | LED Strip | Accessories
98342


		Diffusor	Code <u>98941</u>
		Diffusor	Code <u>98942</u>
		Diffusor - Opalen Diffusor	Code <u>98943</u>
		Diffusor	Code <u>98930</u>
		Diffusor	Code <u>98898</u>
		Diffusor	Code <u>98899</u>
		Diffusor	Code <u>98900</u>
		Diffusor	Code <u>98917</u>

Ribbon Basic 60 LEDs/m | LED Strip | Accessories
98342



Diffusor

Code
98938



Endkappe

Code
98393




Endkappe

Code
98418



Federn für den Einbau

Code
98394



Federn für den Einbau - 5 Stück

Code
98420