


Poller & Mastaufsatzleuchten

180-264 V AC /230-280 V DC | 3 x powerLED 4.5 W DC - 5.5 W AC | CRI 80

C00002BNADI

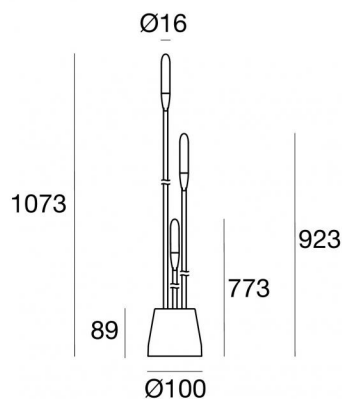

Technische Daten	
Typ	Poller
Installationsposition	Boden
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	powerLED
Optik	Diffuses
Light emission direction	frontal
Lampe Nennleistung	4.5 W DC
Gesamtleistung	5.5 W
Lichtstrom (Lichtquelle)	450 lm
Nominale Eingangsspannung	220 - 240 V AC
Eingangsspannungsbereich	180 - 264 V AC
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tone	2200 K
Farbwiedergabeindex	80 Ra
Gleichstrom/Gleichspannung	AC
Isolierklasse	2
IP	IP65
IK	IK08
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Driver
Leuchte dimmbar	Nein
Schwenkbarkeit	Orientabile tramite flessibile
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	0.8 Kg
Schutz vor elektrostatischen Entladungen	Ja
Schutz vor Stoßspannungen	1 KV

Oberfläche Oberfläche Gehäuse

Farbe Braun

Oberfläche Oberfläche diffusor

Material Polymethylmethacrylat UV-beständige

Farbe Opal

Bearbeitungstyp Sandstrahlen

Oberfläche Oberfläche sockel

Material Kunststoff ABS

Farbe Braun

Bearbeitungstyp Lackierung

Poller & Mastaufsatzleuchten | 180-264 V AC /230-280 V DC | 3 x powerLED 4.5 W DC - 5.5 W AC | CRI 80
C00002BNADI

Single emission bollard & pole for outdoor application. The ancient white LED light source with a diffused light distribution is composed of 3 powered LEDs with CCT of 2200 K and a CRI 80; the source luminous flux is 450 lm, with a 100.0 lm/W nominal luminous efficacy.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The device body and features a brown finish; the diffuser is made of uv resistant polymethylmethacrylate with a sandblasting treatment.

The ingress protection degree is IP65; the total weight is of 0.8 kg.

The total absorbed power is 5.5 W

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

Dieses Produkt enthält 3 Lichtquellen der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Lichtstrom (Lichtquelle)	450 lm
Farbtemperatur	2200 K
Standard Deviation of Colour Matching	1/16 ANSI BIN
Farbwiedergabeindex	80 Ra
Standardumgebungstemperatur	-25 / +50°C


LED Life / Failure Ratio

L70 B10 C0 214455h (at Tj 65 Ta 25)

L80 B10 C0 136355h (at Tj 65 Ta 25)

L90 B10 C0 67466h (at Tj 65 Ta 25)

Blum Spike | Bollard & Pole | Accessories
C00002BNADI



Erdspießen
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
14931