Rubber 3D

LED Strip | 560 topLED 50 W DC 24 V | 10 W/m
1157.8 Lm/m | CRI >90
C00127WHTDI





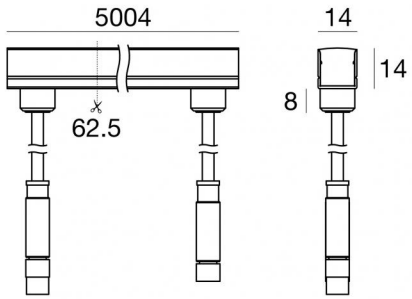

Technische Daten	
Länge	5000 mm
Minimaler Schnitt	62.5 mm
Typ	LED Strip
Installationsposition	Wand - Decke
Installationsumgebung	Outdoor
Lichtquelle	LED
Circuit structure	topLED
Optik	Diffuses
Light emission direction	downward
Lampe Nennleistung	50 W DC
Lampenleistung / m	10 W / m
Lichtstrom (Lichtquelle)	5789 lm
Lichtstrom (Lichtquelle) / m	1157.8 lm / m
Ähnlichste Farbtemperatur / Tone	3500 K
Farbwiedergabeindex	>90 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP67
IK	IK07
Glühdrahtprüfung	650°
Direkte Montage auf normal entflammbaren Oberflächen	Ja
CE	Ja
ETL	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1(M)x0.25 m + 1(F)x0.25 m
Harzbeschichtung	Ja
Typ Lichtabstrahlung	Einflammig
Nettogewicht	1.365 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein

Oberfläche Oberfläche Gehäuse	
Material	Technopolymer
Farbe	Weiß

Oberfläche Oberfläche diffusor	
Material	PU
Farbe	Opal

Elektronik



99331
On/Off Driver 198~264V AC / 176~275V DC 150 W (1 art.)



99332
1-10V Controller (1 - 3 art.)



99374
On/Off Driver 198~264V AC / 176~275V DC 75 W (1 art.)



83333
Push and Simply Dim - DALI-2 Controller (1 - 3 art.)



C-E400002
Push and Simply Dim - DALI-2 Controller (1 - 4 art.)

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

LED Strip | 560 topLED 50 W DC 24 V | 10 W/m | 1157.8 Lm/m | CRI >90
C00127WHTDI

Single emission led strip for outdoor application. The brilliant white LED light source with a diffused light distribution is composed of 560 topled LEDs with CCT of 3500 K and a CRI >90; the source luminous flux is 5789 lm, with a 115.8 lm/W nominal luminous efficacy.

The device body is made of technopolymer and features a white finish; the diffuser is made of pu.

The ingress protection degree is IP67; the total weight is of 1.365 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 50 W The power supply cable is included and features a 1(M)x0.25 m + 1(F)x0.25 m length.

The device features protection class III and can be wall lights or ceiling-mounted with an outer casing, code 82199(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

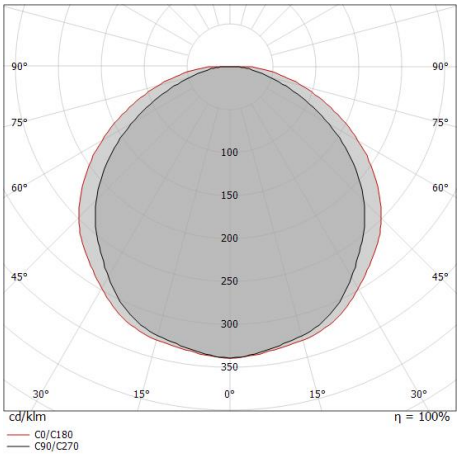

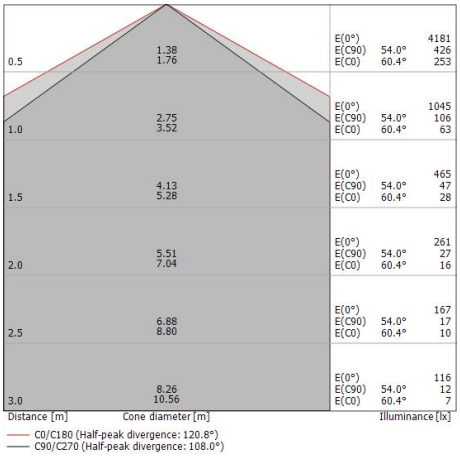

Energieeffizienzklasse
Dieses Produkt enthält 5 Lichtquellen der Energieeffizienzklasse E.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	53 %
Lichtstrom (Lichtquelle)	5789 lm
Leuchten Lichtstrom	3080 lm
Consumption	49 W
Leuchten Lichtausbeute	62 lm/W
Farbtemperatur	3500 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	>90 Ra
Standardumgebungstemperatur	-20 / +55°C

LED Life / Failure Ratio
L70 B10 C0 191000h
L80 B10 C0 120000h
L90 B10 C0 58000h

UGR	
UGR axial	24.7
UGR transversal	27.1
X=4H | Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C90/C270	108°
Optik C0/C180	121°
Light distribution simmetry	Symmetrical 2 assis

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D | LED Strip | Accessories
C00127WHTDI





Endkappe
Material:, farbe:Transparent.

Code
99539



Stecker

Code
89548



Strip Service - Doppelseitiges Klebeband 33 Meter

Code
99520





Kabelklemme

Code
98990



Erdspießen - ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG ZAPFEN + HALTERUNG
D114X204 fur Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: terreno,Material Verkleidung: uv beständiges polycarbonat

Code
83351





Klammer - Clip mit Zahnfeder - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400001





Klammer - Clip mit Zahnfeder - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=23mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400002





Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
C-F400003

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D | LED Strip | Accessories
C00127WHTDI





Klammer - Clip mit Zahnfeder mit Kabeldurchlass - Anodised Black Aluminium - für Rubber 3D (nicht für Rubber 3D PROtection)
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-F400004





Einbaugehäuse - Linearprofil aus Aluminium 19x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3d Pixel
installationsposition: wand, decke L=1000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99549





Einbaugehäuse - Linearprofil aus Aluminium 19x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=18mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82198





Profil - Schwarzes Aluminium 18x19 Profil 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100007





Profil - Schwarzes Aluminium 18x19 Profil 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100008





Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x1000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=1000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
83034





Einbaugehäuse - Linearprofil mit Aluminium-Kabelkanal 39x18x2000mm für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
installationsposition: wand, decke L=2000mm, H=39mm, D=19mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
82199





Profil - Profil 39x19 Aluminium schwarz 1m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100009

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Rubber 3D | LED Strip | Accessories
C00127WHTDI





Profil - Profil 39x19 Aluminium schwarz 2m für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic, Rubber 3D Pixel
Material:Aluminium, farbe:Black, bearbeitungstyp :Eloxierung.

Code
C-K100010





Klammer - Flexibles Profil
installationsposition: wand, decke L=1045mm, H=19mm, D=16.2mm.
Material:Edelstahl --, farbe:Stahl.

Code
99541





Klammer - Clip mit Zahnfeder mit Kabelkanal
installationsposition: wand, decke L=50mm, H=41mm, D=21mm.
Material:Aluminium, farbe:Aluminium, bearbeitungstyp :Eloxierung.

Code
99537





Lochschablone
Material:Aluminium, farbe:Polished aluminium.

Code
C-V200005





Kabel und Stecker - Kabel(M) für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic
Länge 2500 mm; isolierung doppio; querschnitt 0.5 mm²; farben: weiß - grau.

Code
C-W200001





Kabel und Stecker - Kabel(F) für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic
Länge 2500 mm; isolierung doppio; querschnitt 0.5 mm²; farben: weiß - grau.

Code
C-W200002





Kabel und Stecker - Kabel für Rubber 3D, Rubber 3D Concrete, Rubber 3D 48V, Rubber 3D Optic
Länge 5000 mm; isolierung doppio; querschnitt 0.5 mm²; farben: weiß - grau.

Code
C-W200007

Linea Light Group reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information are binding for Linea Light Group. Linea Light Group will not be held liable for any illustration, text and/or translation\ errors. All values indicated are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.